





SYMMONS HYDAPIPE®

Location:




Displayed: H901S



Displayed: H903S



H901S, H903S
Surface-Mounted Shower System
Specification Submittal

<p>Model Numbers</p>	<p>Feature Highlights</p>
<p><input type="checkbox"/> H901S Through-wall piping configuration with soap dish</p> <p><input type="checkbox"/> H903S Through-ceiling piping configuration with soap dish and custom extension shield</p>	<ul style="list-style-type: none"> • Pressure-balancing mixing valve with screwdriver service stops and adjustable stop screw to limit handle turn • Showerhead is Fre-Flo, all brass with ball joint • Attached soap dish and sloped metal top cap • Stainless steel covering to be 18 gauge with #4 brush finish • 2.0 gpm (7.6 L/min) standard flow rate
<p>Options/ Modifications</p>	<p>Compliance</p>
<p><input type="checkbox"/> Delete S Remove Modifier for Less Soap Dish</p> <p><input type="checkbox"/> RS Recessed soap dish</p> <p><input type="checkbox"/> 21 Manual shutoff - cross handle single supply</p> <p><input type="checkbox"/> 22 Manual shutoff - lever handle single supply</p> <p><input type="checkbox"/> 60 Metering shutoff single supply</p> <p><input type="checkbox"/> 56 Pressure-balancing + metering dual supply</p> <p><input type="checkbox"/> WD Winter drain relief valve on supply (only available with single supply modifiers)</p> <p><input type="checkbox"/> REV Valve with reverse seat - for back-to-back installation</p> <p><input type="checkbox"/> L1 Less showerhead</p> <p><input type="checkbox"/> 15 1.5 gpm (5.7 L/min) flow restrictor</p> <p>Note: Append appropriate -suffix to model number.</p>	<p>- ASME A112.18.1/CSA B125.1</p> <p>- ASSE 1016</p>   <p>Warranty</p> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 


Architectural/ Engineering Specification

Symmons Surface-Mounted Shower System _____ Includes Pressure-balancing mixing valve with screwdriver service stops and adjustable stop screw to limit handle turn. Showerhead is Fre-Flo, all brass with ball joint. Attached soap dish and sloped metal top cap. Stainless steel covering to be 18 gauge with #4 brush finish, 2.0 gpm (7.6 L/min) standard flow rate. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, ASSE 1016 compliant. Available options: "S - Remove Modifier for Less Soap Dish", "RS - Recessed soap dish", "21 - Manual shutoff - Cross handle single supply", "22 - Manual shutoff - lever handle single supply", "60 - Metering shutoff single supply", "56 - Pressure-balancing + metering dual supply", "WD - Winter drain relief valve on supply (only available with single supply modifiers)", "REV - Valve with reverse seat - for back-to-back installation", "L1 - Less showerhead", "15 - 1.5 gpm (5.7 L/min) flow restrictor".



H901S, H903S

Dimensions

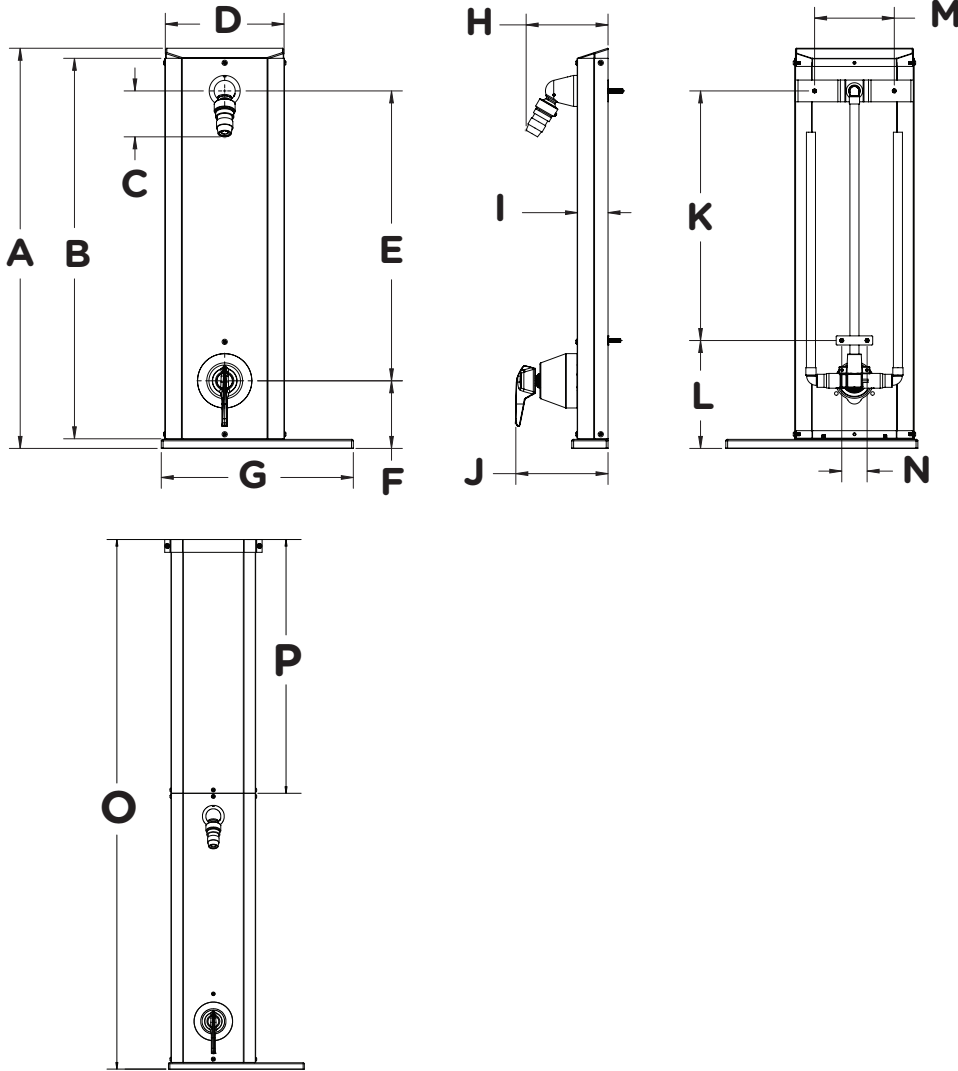

Measurements	
A	27-5/8" 701mm
B	26-1/4" 667mm
C	3-3/16", 80 mm
D	8-3/16" 208mm
E	20" 508mm
F	4-11/16" 118mm
G	13-1/4", 337 mm
H	5-5/8" 143mm
I	2-1/8" 53mm
J	6-3/8" 162mm
K	17-1/4" 437mm
L	7-7/16" 189mm
M	5-1/2" 140mm
N	1-3/4" 44mm
O	PER DRAWING
P	PER DRAWING

Note: Dimensions O and P for H903S only