

# HYDAPIPE®

## Surface Mounted Shower System

- 1-905S:** Horizontal piping configuration with soap dish
- 1-905:** Horizontal piping configuration less soap dish

Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Fre-Flo, all brass, vandal resistant head with ball joint on institutional type head bracket. Attached soap dish and matching horizontal supply covers and all fittings for direct connection to 1 1/2" copper horizontal supplies. 1 1/2" copper tubing not supplied by manufacturer. Stainless steel covering to be 18 gauge with #4 brush finish.

**Modifications:**

**Valve:**

- Suffix 21:** Single supply, manual shut off, 4 arm handle
- Suffix 22:** Single supply, manual shut off, lever handle
- Suffix 60:** Single supply, metering shut off
- Suffix 56:** Pressure Balance and metering combination

**Shower head:**

- Suffix 270:** Fre-Flo, all brass, ball joint, adjustable spray with volume control
- Suffix 131:** Super, ball joint, adjustable spray head
- Suffix 121:** Super, ball joint, adjustable spray head with volume control
- Suffix 285:** Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix OWBJ:** One way ball joint

**Soap dish:**


- Suffix RS:** Recessed soap dish
- Suffix CWM:** Wall mounted cake soap dish

**Hand spray accessories:**

- Suffix FS:** Hand spray, hose and wall hook
- Suffix FSB:** Hand spray, hose and 30" slide bar for hand spray mounting.
- Suffix OD:** Quick disconnect for hand spray units

**Horizontal Supply Cover:**

- Specify number of shower heads (3' on center standard): \_\_\_\_\_
- Room layout with applicable dimensions attached

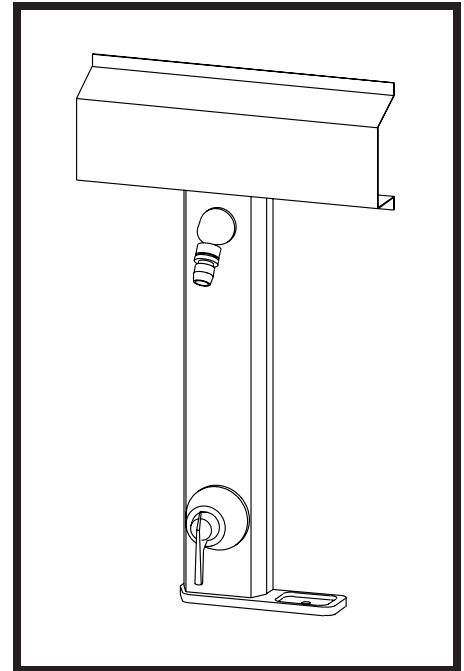

**SYMMONS PRODUCTS MEET  
ANSI A112.18.1M, EPA '92  
AND ALL KNOWN FLOW RATE  
REQUIREMENTS.  
Shower Heads and Hand Showers  
2.5 GPM (9.5 L/min)**

**Job/Location**

.....  
.....

**Engineer**

.....  
.....

**Contractor**

.....  
.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.