

# HYDAPIPE®

## Surface Mounted Double Shower System

- 1-921:** Through wall piping configuration less soap dish
- 1-921C:** Through wall wall piping configuration with cake soap dish affixed to unit

Each station consists of: Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Fre-Flo, all brass, vandal resistant head with ball joint on institutional type head bracket. Stainless steel covering to be 18 gauge with #4 brush finish.

**Modifications:**

**Valve:**

- Suffix 21:** Single supply, manual shut off, 4 arm handle
- Suffix 22:** Single supply, manual shut off, lever handle
- Suffix 60:** Single supply, metering shut off
- Suffix 56:** Pressure Balance and metering combination

**Shower head:**


- Suffix 270:** Fre-Flo, all brass, ball joint, adjustable spray with volume control
- Suffix 231:** Super, ball joint, adjustable spray head
- Suffix 121:** Super, ball joint, adjustable spray head with volume control
- Suffix 285:** Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix OWBJ:** One way ball joint

**Soap dish:**

- Suffix CWM:** Wall mounted cake soap dish

**Hand spray accessories (Specify left or right unit location):**

- Suffix FS:** Hand spray, hose and wall hook
- Suffix FSB:** Hand spray, hose and 30" slide bar
- Suffix OD:** Quick disconnect for hand spray units

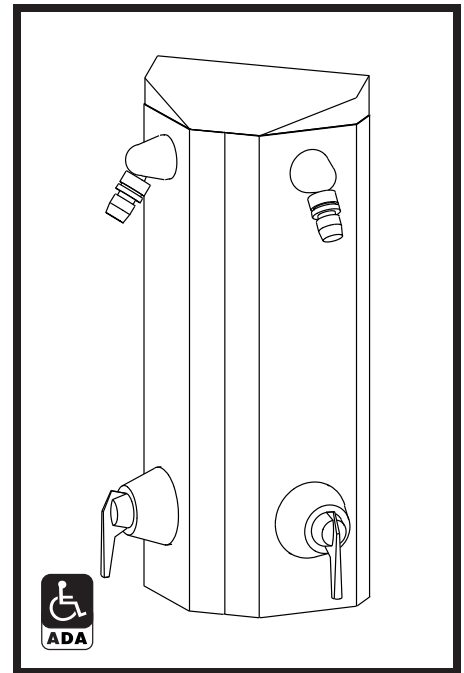

**SYMMONS PRODUCTS MEET  
ANSI A112.18.1M, EPA '92  
AND ALL KNOWN FLOW RATE  
REQUIREMENTS.  
Shower Heads and Hand Showers  
2.5 GPM (9.5 L/min)**

**Job/Location**

.....  
 .....

**Engineer**

.....  
 .....

**Contractor**

.....  
 .....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.