

HYDAPIPE®

Surface Mounted Tub and Shower System

1-941: Through wall piping configuration

Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Fre-Flo, all brass, vandal resistant head with ball joint on institutional type head bracket, diverter type tub spout. Sloped metal top cap. Stainless steel covering to be 18 gauge with #4 brush finish.

Modifications:

Valve:

- Suffix 21:** Single supply, manual shut off, 4 arm handle
- Suffix 22:** Single supply, manual shut off, lever handle
- Suffix 60:** Single supply, metering shut off
- Suffix 56:** Pressure Balance and metering combination

Shower head:


- Suffix 270:** Fre-Flo, all brass, ball joint, adjustable spray with volume control
- Suffix 231:** Super, ball joint, adjustable spray head
- Suffix 221:** Super, ball joint, adjustable spray head with volume control
- Suffix 285:** Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix OWBJ:** One way ball joint

Soap dish:

- Suffix CWM:** Wall mounted cake soap dish

Hand spray accessories (Specify left or right unit location):

- Suffix FS:** Hand spray, hose and wall hook
- Suffix FSB:** Hand spray, hose and 30" slide bar
- Suffix QD:** Quick disconnect for hand spray units

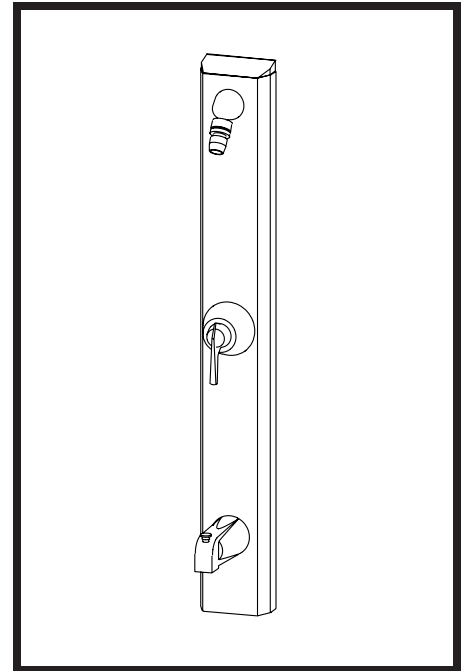

**SYMMONS PRODUCTS MEET
ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

Job/Location

.....

Engineer

.....

Contractor

.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.