

Location:



SYMMONS Carrington®

S-4404-TRM, S4404TRMTC

Tub/Hand Shower Trim

Specification Submittal




Model Numbers

- S-4404-TRM** Tub/Hand Shower Trim with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve ordered separately
- S4404TRMTC** Tub/Hand Shower Trim with integral diverter control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Feature Highlights

- Carrington Tub/Hand Shower Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve
- Integral diverter control
- Metal lever handle
- 6-1/2" non-diverter tub spout
- Cradle for hand shower wand
- 60" flexible metal hose
- 3 mode hand shower
- Dual checks for backflow protection
- 2.0 gpm (7.6 L/min) flow restrictor
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S4404TRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Options/ Modifications

- 1.5**  **1.5 gpm (5.7 L/min) flow restrictor**
- STN** **Satin Nickel finish**
- L2** **Less hand shower wand**
- L5** **Less hand shower system (less bar/ cradle, hose, wand and elbow)**
- L7** **Less handle**

Note: Append appropriate -suffix to model number.

Compliance

- ASME A112.18.1/CSA B125.1



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.


10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/ Engineering Specification

Symmons Carrington Tub and Hand Shower Trim _____ Includes Carrington Tub and Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub and Shower Valve, Integral diverter control, Metal lever handle, 6-1/2" non-diverter tub spout, Cradle for hand shower wand, 60" flexible metal hose, 3 mode hand shower, Dual checks for backflow protection, 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S4404TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "STN - Satin Nickel finish", "L2 - Less hand shower wand", "L5 - Less hand shower system (less bar/ cradle, hose, wand and elbow)", "L7 - Less handle".

Dimensions

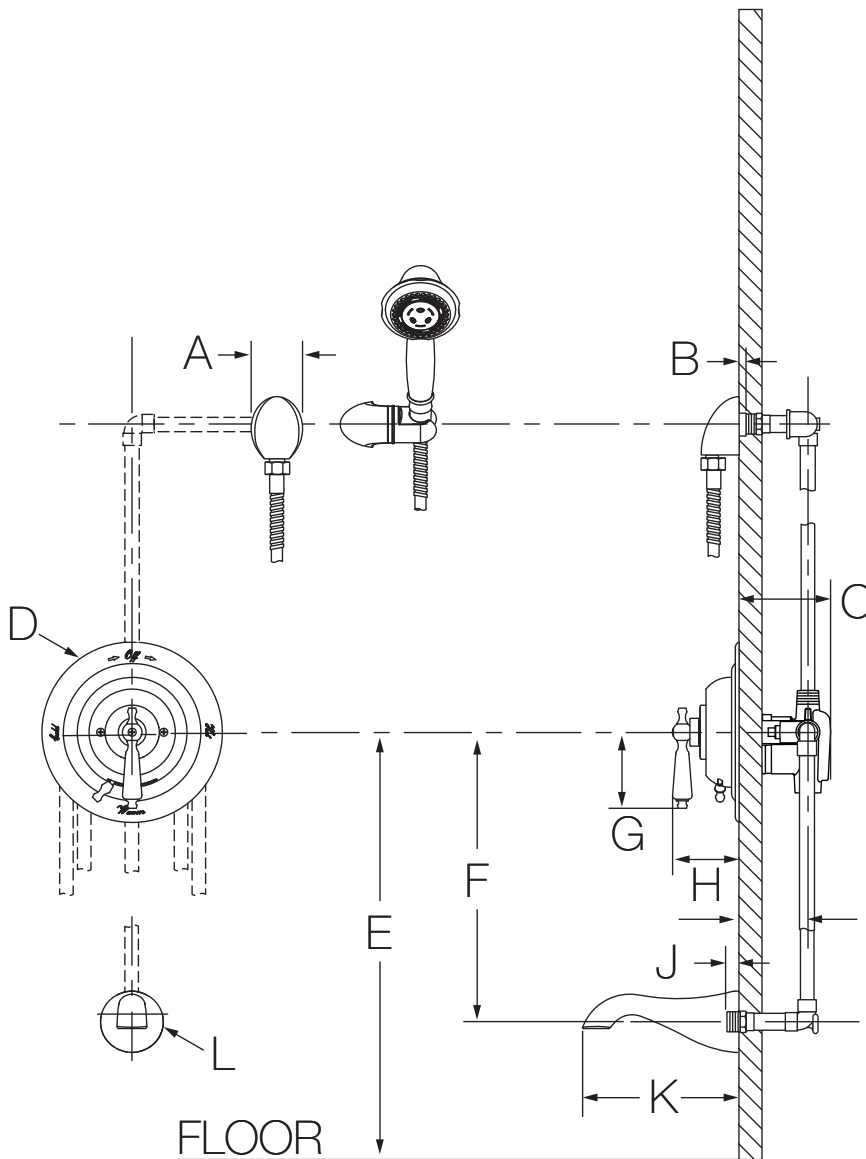

Measurements	
A	2-1/8", 54 mm
B	Male 1/2" IPS fitting must be recessed 1/4" (6 mm) from finished wall
C	3-1/2", 89 mm
D	Ø 7-1/2", 191 mm
E	Ref. 32", 813 mm
F	Ref. 12", 305 mm
G	3-1/8", 79 mm
H	2-3/4", 70 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
J	Male 1/2-14 NPT fitting must protrude 1/2" (13 mm) from finished wall
K	6-1/2", 165 mm
L	Ø 2-5/8", 67 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.