






# S4991TRM Shower Trim Specification Submittal

Location:



<p><b>Model Numbers</b></p> <p><input type="checkbox"/> <b>S4991TRM</b> Shower Trim</p> <p><b>Valve Options:</b> -S261 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier -S161 Series Temptrol VersaFlex Shower Valve requires TC modifier</p>	<p><b>Options/Modifications</b></p> <p><input type="checkbox"/> <b>15</b> <b>CG</b> 1.5 gpm (5.7 L/min) flow restrictor</p> <p><input type="checkbox"/> <b>MB</b> Matte Black finish</p> <p><input type="checkbox"/> <b>STN</b> Satin Nickel finish</p> <p><input type="checkbox"/> <b>L1</b> Less showerhead</p> <p><input type="checkbox"/> <b>L7</b> Less handle</p> <p><input type="checkbox"/> <b>TC</b> Test Cap Trim (includes TA-10™ &amp; T-12A) used with S161 Series Temptrol VersaFlex Valve</p>
<p><b>Feature Highlights</b></p> <ul style="list-style-type: none"> <li>• Verity Shower Trim.</li> <li>• Requires Temptrol VersaFlex Pressure-Balancing Shower Valve.</li> <li>• Metal lever handle.</li> <li>• Standard 2.0 gpm (7.6 L/min) flow rate.</li> <li>• Integral volume control.</li> <li>• Single-mode showerhead.</li> <li>• Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.</li> </ul>	<p><b>Warranty</b></p> <p><b>Limited Lifetime</b> - for residential installations. <b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p> 
<p><b>Compliance</b></p> <ul style="list-style-type: none"> <li>• ASME® A112.18.1/CSA® B125.1</li> <li>• WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)</li> <li>• Lever handle meets ADA requirements for operation</li> <li>• 1.5 gpm option meets CALGreen requirements</li> </ul>   	

## SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S4991	STN	L7	15	TRM		S4991STNL115TRM
S4991	MB			TRM	TC	S4991MBTRMTC

**Notes:** No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

## Architectural/Engineering Specification

Symmons \_\_\_\_\_ Includes Verity Shower Trim for Temptrol VersaFlex Pressure-Balancing Shower Valve. Features metal lever handle, integral volume control, single-mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), and 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. 1.5 gpm option meets CALGreen requirements. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L7 = Less handle, MB = Matte Black finish, STN = Satin Nickel finish, TC = Test Cap Trim.

## Dimensions

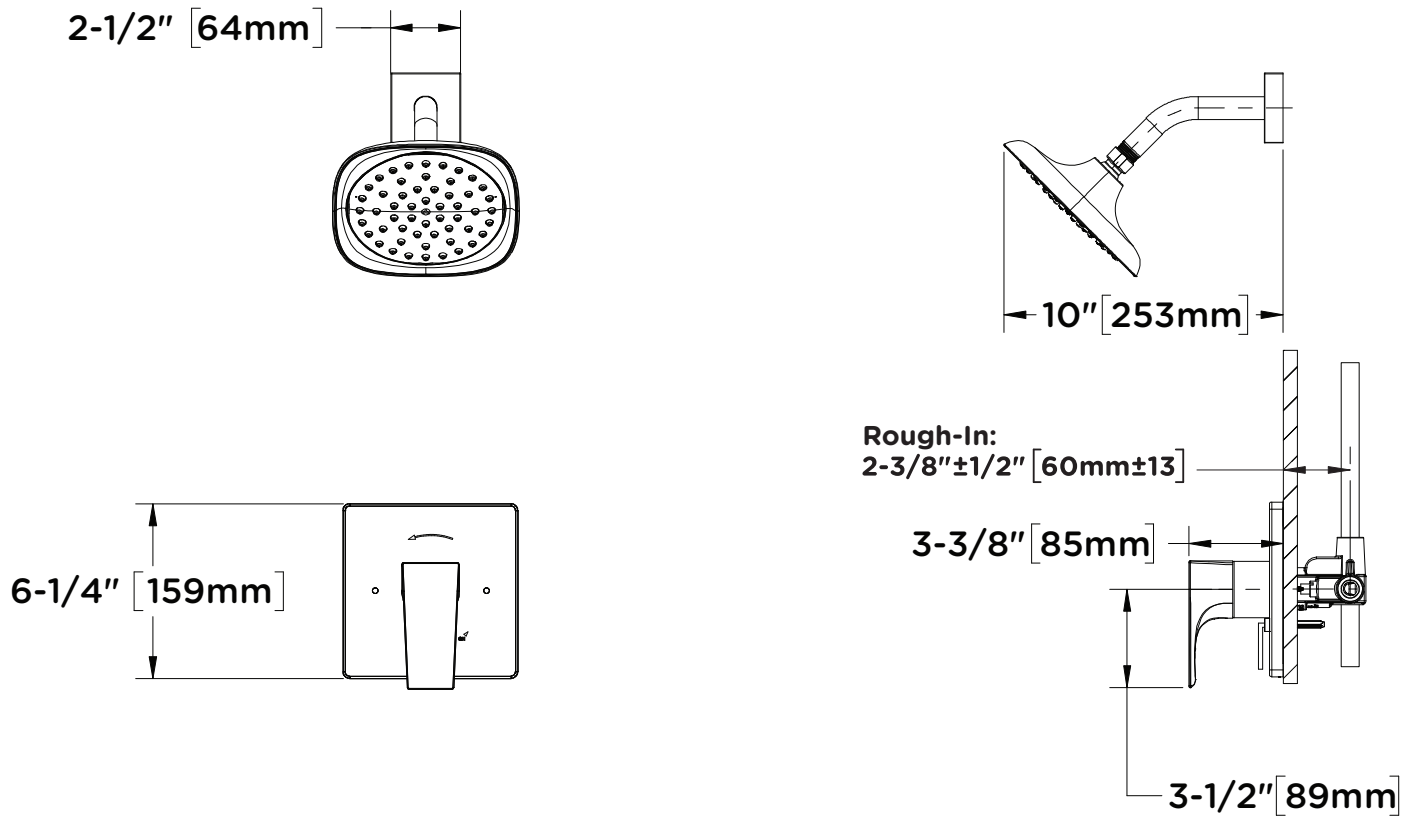

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.