

# Location:




3503BTRM  
Hand Shower System  
**Specification Submittal**



## Model Numbers

- 3503BTRM**  
Tub/Shower System
- 3503BTRMTC**  
Tub/Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

## Modifications

- 1.5**  **1.5 gpm (5.7 L/min) flow restrictor**
- Delete Suffix B** **Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon**
- L2** **Less hand shower (wand only)**
- L7** **Less handle**
- STN** **Satin Nickel finish**
- BBZ** **Brushed Bronze finish**
- MB** **Matte Black finish**

**Note:** Append appropriate -suffix to model number.

## Feature Highlights

- Hand shower system powered by the Temptrol® Pressure
- Balancing valve
- Features adjustable stop screw to limit handle turn
- 30" slide bar
- In-line vacuum breaker
- 60" flexible metal hose
- 1 mode hand shower
- Standard 2.0 gpm (7.6 L/min) flow restrictors
- Components made from metal and nonmetallic materials plated in standard polished chrome finish.



## Compliance

-ASME A112.18.1/CSA B125.1  
-WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)



## Warranty


**Limited Lifetime** - to the original end purchaser in consumer/residential installations.  
**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



## Architectural/Engineering Specification

Symmons Dia Hand Shower System \_\_\_\_\_ Includes Hand shower system powered by the Temptrol® Pressure, Balancing valve, Features adjustable stop screw to limit handle turn, 30" slide bar, In-line vacuum breaker, 60" flexible metal hose, 1 mode hand shower and standard 2.0 gpm (7.6 L/min) flow restrictors, Components made from metal and nonmetallic materials plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "Delete Suffix B - Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon", "L/HS - Less hand shower", "TRM - Trim only, valve not included", "L2 - Less hand shower (wand only)", "L7 - Less handle", "STN - Satin Nickel finish", "BBZ - Brushed Bronze finish", "MB - Matte Black finish".

## Dimensions

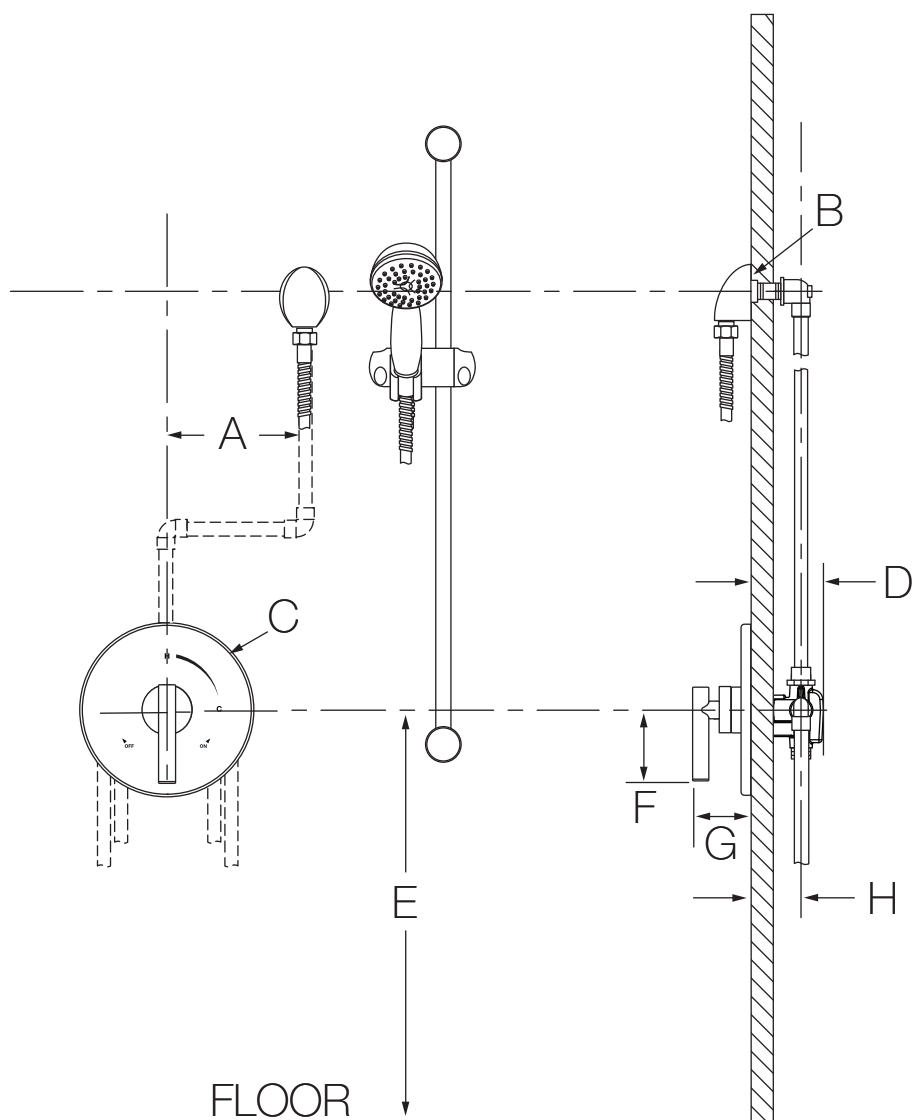

Measurements	
<b>A</b>	6", 152 mm
<b>B</b>	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
<b>C</b>	Ø 7-1/2", 191 mm
<b>D</b>	3-1/2", 89 mm
<b>E</b>	Ref. 42", 1067 mm
<b>F</b>	3", 76 mm
<b>G</b>	2-7/8", 73 mm
<b>H</b>	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

### Notes:

- 1) All dimensions measured from nominal rough-in (see H as reference).
- 2) Dimensions are subject to change without notice.