



Location:




3604
Tub/Hand Shower System
Specification Submittal

Model Numbers	Feature Highlights
<input type="checkbox"/> 3604 Duro Tub/Hand Shower System	<ul style="list-style-type: none"> • Tub/hand shower system powered by the Temptrol® Pressure Balancing valve • Features 30" slide bar • In-line vacuum breaker • 60" flexible metal hose • Diverter tub spout • 1 mode hand shower • Standard 2.0 gpm (7.6 L/min) flow restrictor • Components made from metal and nonmetallic materials plated in standard polished chrome finish
Modifications	Compliance
<input type="checkbox"/> 1.5 1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> L2 Less hand shower wand <input type="checkbox"/> L5 Less hand shower system (Bar/cradle, hose, wand and elbow) <input type="checkbox"/> MB Matte Black finish <input type="checkbox"/> STN Satin Nickel finish <input type="checkbox"/> TRM Trim only, valve body ordered separately	<p>-ASME A112.18.1/CSA B125.1</p>  <hr/> <p>Warranty</p> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 

Architectural/Engineering Specification



Symmons Duro Tub and Hand Shower System _____ Includes TTub/hand shower system powered by the Temptrol® Pressure Balancing valve. Features 30" slide bar, In-line vacuum breaker, 60" flexible metal hose, Diverter tub spout, 1 mode hand shower and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetallic materials plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L2 - Less hand shower wand", "L5 - Less hand shower system (Bar/cradle, hose, wand and elbow)", "MB - Matte Black finish", "STN - Satin Nickel finish", "TRM - Trim only, valve body ordered separately".

Dimensions

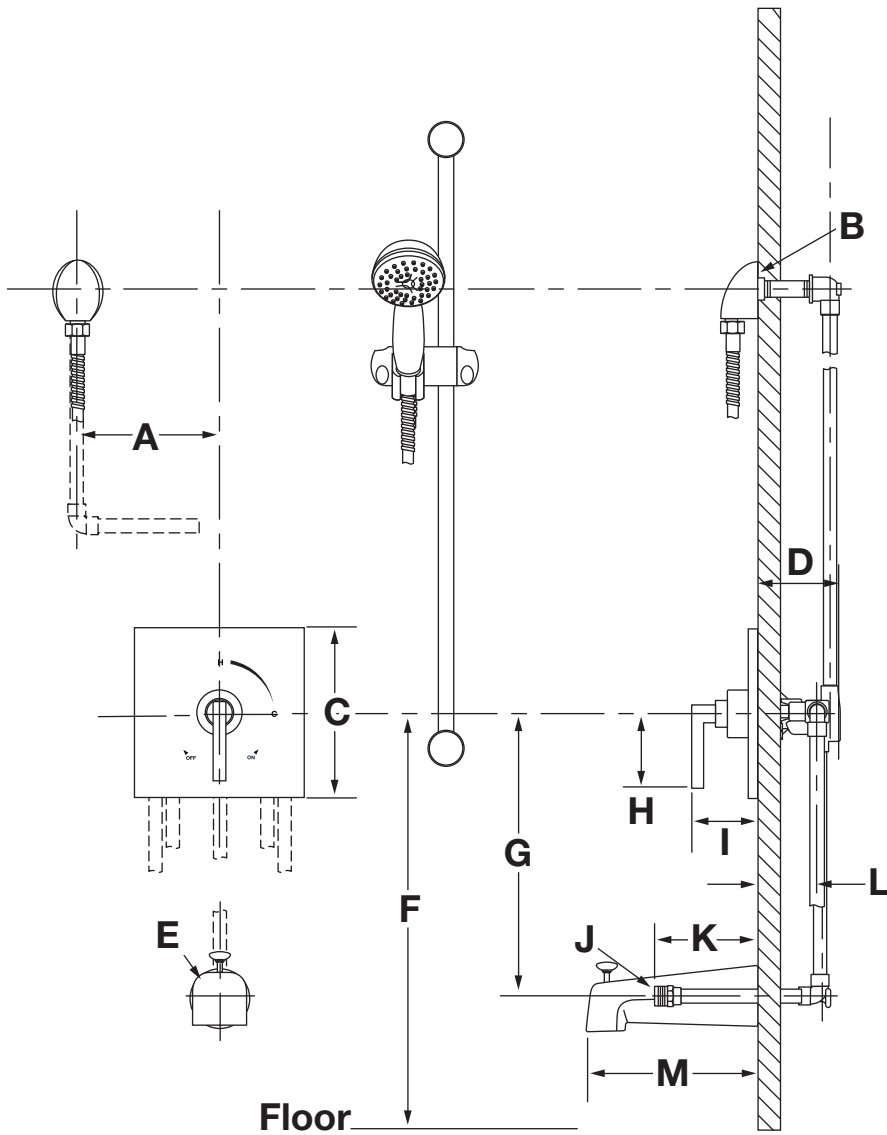

Measurements	
A	6", 152 mm right or left
B	Male 1/2-14 NPT thread must be recessed 1/4" from finished wall
C	7 1/2", 191 mm
D	3 1/2", 89 mm
E	Ø 2 1/2", 64 mm
F	32", 813 mm
G	12", 305 mm
H	3 1/8", 79 mm
I	3 1/2", 89 mm
J	Male 1/2-14 NPT fitting must protrude 5 1/2" (140 mm) from finished wall
K	5 1/2", 140 mm
L	Rough-in 2 3/8" ± 1/2", 60 mm ± 13 mm
M	7", 178 mm
N	2 1/4", 57 mm
O	2 3/4", 70 mm
P	3/8", 10 mm
Q	6 1/2", 165 mm
R	Female 1/2-14 NPT fitting must be recessed 3/8" from finished wall

-T2



Notes:

- 1) All dimensions measured from nominal rough-in (see L as reference).
- 2) Dimensions are subject to change without notice.