


Location:

# SYMMONS® Sereno™

## Shower System with Hand Shower 4305 Specification Submittal

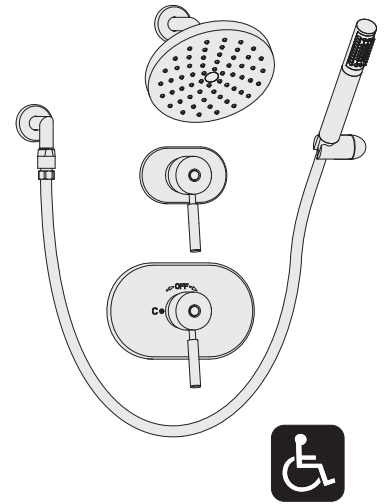

### Feature Highlights

- Symmons Shower System with Hand Shower
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn
- Separate dual outlet lever diverter valve
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Shower head with mounting bracket
- Flow rate 2.5 gpm (9.5 L/min) for both shower head and hand shower
- Metal construction with polished chrome finish

### Model Numbers

- 4305 .....Shower System with Hand Shower and Temptrol® mixing valve p/n 4000-BODY and dual outlet diverter p/n 2DIV-BODY
- 4305-TRM .....Trim only, valve and diverter must be ordered separately
- 4000-BODY.....Symmons Temptrol® mixing valve without trim
- 4000-X-BODY.... Symmons Temptrol® mixing valve without trim. Valve includes integral service stops to allow water shut-off for service.
- 2DIV-BODY.... Symmons dual outlet diverter valve without trim

### Options / Modifications

Append appropriate -suffix to model number

- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- X Symmons Temptrol® mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 4305.)
- 2.0 2.0 (7.6 L/min) Flow rate restrictor
- 1.5 1.5 (5.7 L/min) Flow rate restrictor
- T724 24" Slide/grab bar with ADA hand shower in place of standard hand shower unit

### Finish Options

Append appropriate -suffix to model number

- STN Satin nickel finish

### Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

# Dimensions *Sereno Shower System with Hand Shower, 4305*

Female 1/2" NPT thread must be recessed  
7/8" (22 mm) min., 2" (51 mm) max. from finished  
wall for proper installation of wall ell and flange.

