

# **Shower System** 4701 Specification Submittal

# Feature Highlights

- Symmons shower system with lever handle.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Showerhead #4-143, 3 modes: flood, mist, pulse spray

☐ 4701.....Shower System with Symmons

- Showerhead mounting bracket and flange
- Flow rate 2.5 gpm (9.5 L/min)
- Polished chrome finish

## **Model Numbers**

	Temptrol® pressure balancing mixing valve p/n 4000-BODY
4701-TRM	Trim only, valve must be ordered separately
4000-BODY	Symmons Temptrol® pressure balancing mixing valve without trim
4000-X-BODY	Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shutoff for service.

### **Finish Options / Modifications**

Append appropriate -suffix to model number.

- □ -STN Satin nickel
  - Polished chrome (standard finish)

#### Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations







### **Options / Modifications**

Append appropriate -suffix to model number.

- I -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- -X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 4701)
- ☐ -L/HD Showerhead not included Includes showerhead arm and flange only
- □ -VP Showerhead is vandal resistant (available with standard 2.5 gpm flow rate only)
- □ -2.0 2.0 (7.6 L/min) flow rate restrictor
- ☐ -1.5 1.5 (5.7 L/min) flow rate restrictor
- ☐ -LAM Metal finish insert handle .....




-LR Lever handle .....



#### Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

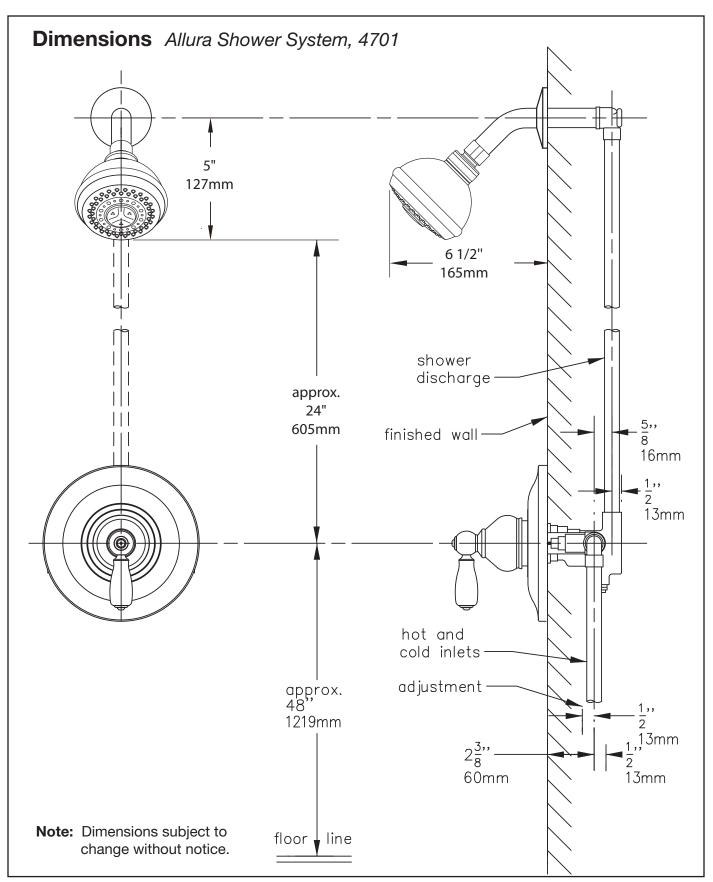

Symmons Industries, Inc. = 31 Brooks Drive = Braintree, MA 02184 (800) 796-6667, (781) 848-2250 = Fax (800) 961-9621, (781) 664-1300 Website: www.symmons.com = Email: customerservice@symmons.com

