




SYMMONS® Dia®







3593BTRM

Location:

Hand Shower Trim

Specification Submittal

<p>Model Numbers</p>	<p>Modifications</p>
<p><input type="checkbox"/> 3593BTRM Hand Shower Trim</p> <p>Valve Options:</p> <ul style="list-style-type: none"> - 261 Series Temptrol® Shower Valve with TRM modifier. - 161 Series Temptrol Shower Valve requires TC modifier. 	<ul style="list-style-type: none"> <input type="checkbox"/> 15 1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> 175 1.75 gpm (6.6 L/min) flow restrictor <input type="checkbox"/> Delete Suffix B Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon <input type="checkbox"/> L2 Less hand shower (wand only) <input type="checkbox"/> L7 Less handle <input type="checkbox"/> TC Test Cap Trim (includes TA-10™ & T-12A) used with 161 Series Temptrol Valve <input type="checkbox"/> BBZ Brushed Bronze finish <input type="checkbox"/> MB Matte Black finish <input type="checkbox"/> STN Satin Nickel finish <input type="checkbox"/> 1L 1-Inch Spindle Extension
<p>Feature Highlights</p> <ul style="list-style-type: none"> • Dia Hand Shower Trim. • Requires Temptrol Pressure-Balancing Shower Valve. • 30" slide bar. • 60" flexible metal hose. • 7-mode HydroMersion™ hand shower with Non-Positive Shutoff (NPSO). • Standard 2.0 gpm (7.6 L/min) flow restrictors. • Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 	<p>Warranty</p> <p>Limited Lifetime - for residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
<p>Compliance</p> <ul style="list-style-type: none"> • ASME® A112.18.1/CSA® B125.1 • WaterSense® 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/min) 2.0 gpm (7.6 L/min) • Lever handle meets ADA requirements for operation   	

SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	1L	Final SKU
3593B	STN		15	TRM			3593BSTN15TRM
3593	MB	L2		TRM	TC	1L	3593MBL2TRMTC1L

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Dia Hand Shower System _____ Includes Dia Shower Trim for the Temptrol® Pressure-Balancing Shower Valve. Features include 30" slide bar, in-line vacuum breaker, 60" flexible metal hose, 7-mode HydroMersion hand shower with NPSO, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, 175 = 1.75 gpm (6.6 L/min) flow restrictor, Delete Suffix B = Chrome plastic escutcheon, TC = Test Cap Trim, L2 = Less hand shower (wand only), L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, and 1L = 1-Inch spindle extension.

Dimensions

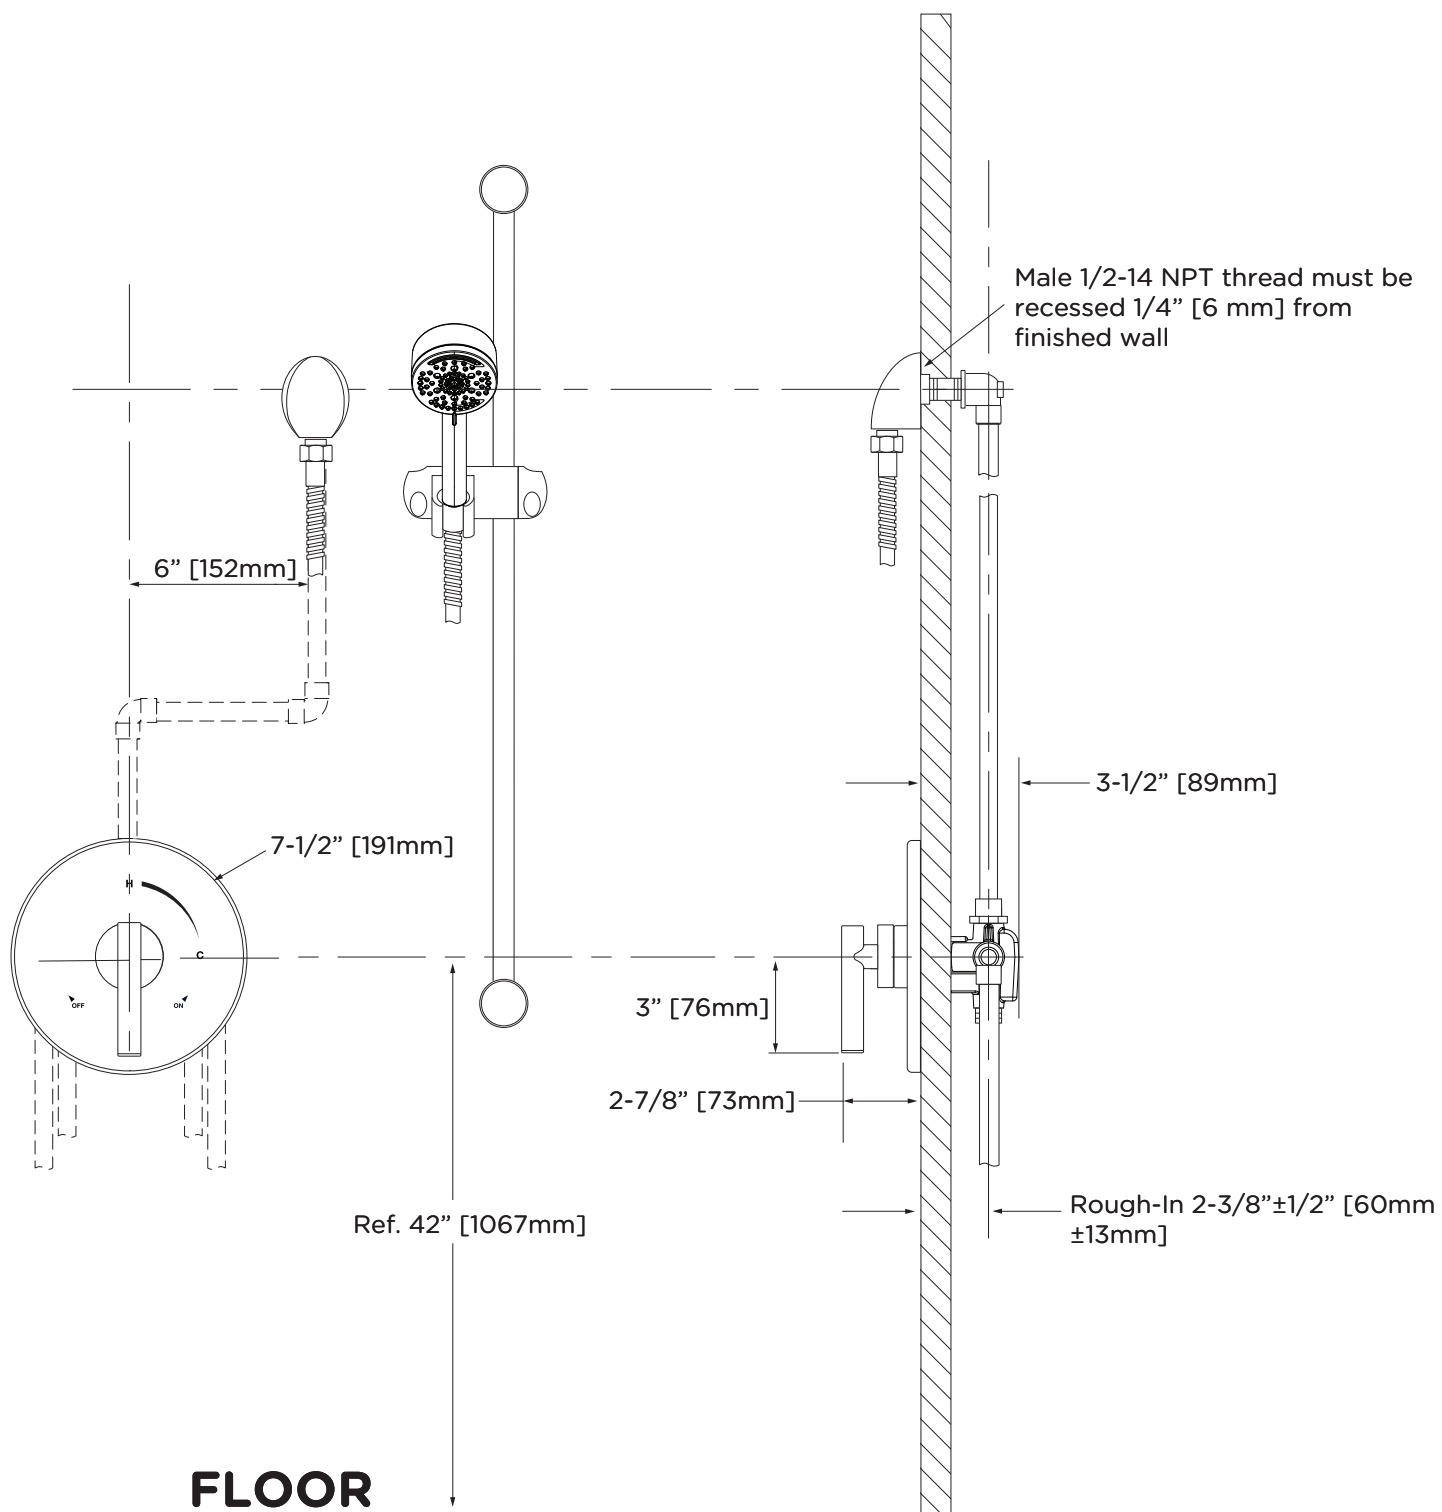

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) from drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions are subject to change without notice.