




# Location:



## S-4304-TRM, S4304TRMTC Tub/Hand Shower Trim Specification Submittal




Feature Highlights	Options/Modifications
<ul style="list-style-type: none"><li>• Sereno Tub/Hand Shower Trim</li><li>• Requires Temptrol® Pressure Balancing Tub/Shower Valve</li><li>• Integral diverter control</li><li>• Metal lever handle</li><li>• 8-1/2" non-diverter tub spout</li><li>• Cradle for hand shower wand</li><li>• 60" flexible metal hose</li><li>• 1 mode hand shower</li><li>• Dual checks for backflow protection</li><li>• 2.0 gpm (7.6 L/min) flow restrictor</li><li>• Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish</li><li>• Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S4304TRMTC)</li><li>• For optional in-line vacuum breaker order p/n EF-109</li></ul>	<ul style="list-style-type: none"><li><input type="checkbox"/> <b>-1.5</b>  1.5 gpm (5.7 L/min) flow restrictor</li><li><input type="checkbox"/> <b>-L1</b> Less showerhead</li><li><input type="checkbox"/> <b>-STN</b> Satin Nickel finish</li></ul> <p><b>Note:</b> Append appropriate -suffix to model number.</p> <hr/> <h3>Compliance</h3> <ul style="list-style-type: none"><li>• ASME A112.18.1/CSA B125.1</li></ul> 
Model Numbers	Warranty
<ul style="list-style-type: none"><li><input type="checkbox"/> <b>S-4304-TRM</b> Tub/Hand Shower Trim with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve ordered separately</li><li><input type="checkbox"/> <b>S4304TRMTC</b> Tub/Hand Shower Trim with integral diverter control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap</li></ul>	<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p> 

## Architectural/ Engineering Specification

Symmons \_\_\_\_\_ With Sereno Tub/Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve, Integral diverter control, Metal lever handle, 8-1/2" non-diverter tub spout, Cradle for hand shower wand, 60" flexible metal hose, 1 mode hand shower, Dual checks for backflow protection, 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S4304TRMTC). 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "STN - Satin nickel finish".

## Dimensions

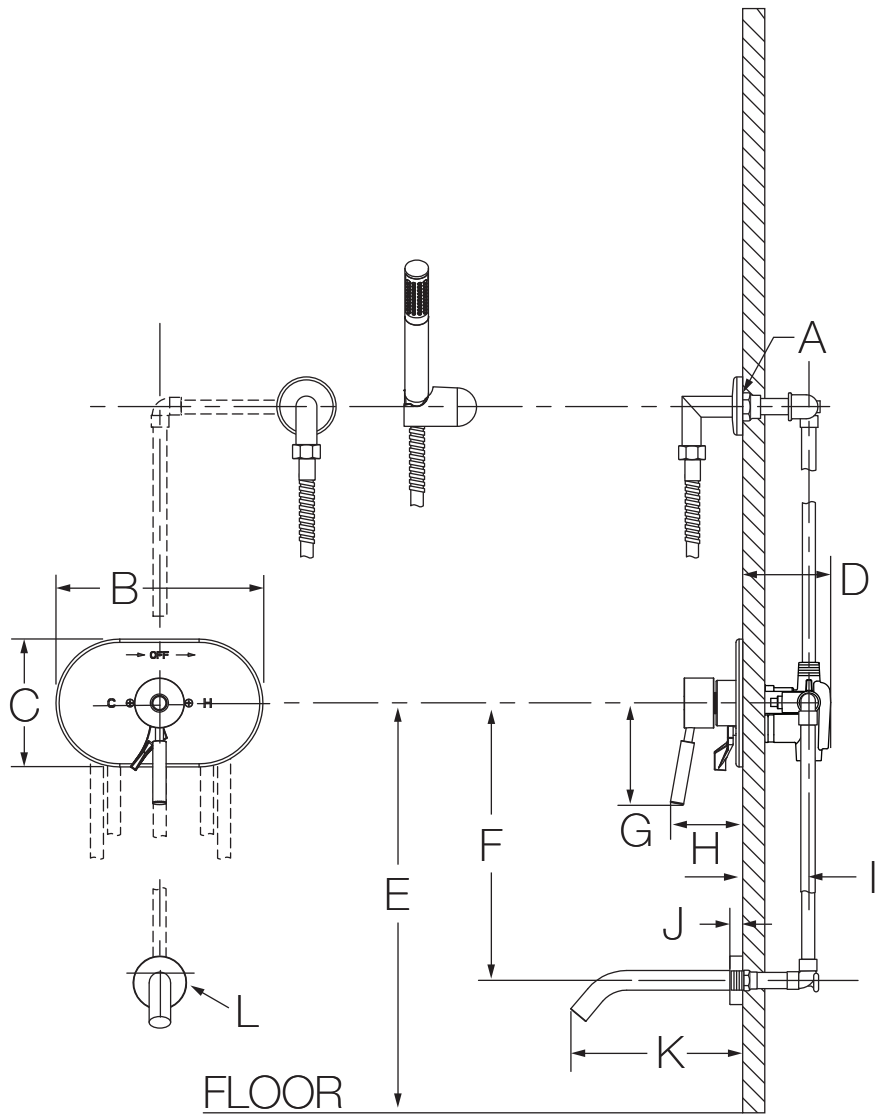

Measurements	
A	Female 1/2" IPS thread must be recessed 7/8" (22 mm) from finished wall
B	9-1/4", 235 mm
C	5-3/4", 146 mm
D	3-1/2", 89 mm
E	Ref. 32", 813 mm
F	Ref. 12", 305 mm
G	4-1/2", 114 mm
H	3-1/4", 83 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
J	Male 1/2-14 NPT fitting must protrude 1/2" (13 mm) from finished wall
K	8-1/2", 216 mm
L	Ø 2-3/8", 60 mm

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.