





Location:




S-6704-TRM, S6704TRM Tub/Hand Shower Trim Specification Submittal

Feature Highlights <ul style="list-style-type: none"> • Identity Tub/Hand Shower Trim • Requires Temptrol® Pressure Balancing Tub/Shower Valve • Integral diverter control • Metal lever handle • 5-1/4" non-diverter tub spout • Cradle for hand shower wand • 60" flexible metal hose • 1 mode hand shower • Dual checks for backflow protection • 2.0 gpm (7.6 L/min) flow restrictor • Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish • Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S6704TRMTC) • For optional in-line vacuum breaker order p/n EF-109 	Options/Modifications <ul style="list-style-type: none"> <input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> L2 Less hand shower wand <input type="checkbox"/> L5 Less hand shower system (cradle, hose, wand and elbow) <input type="checkbox"/> L6 Less tub spout <input type="checkbox"/> L7 Less handle <input type="checkbox"/> TC Test Cap Trim <input type="checkbox"/> -STN Satin Nickel finish <input type="checkbox"/> -MB Matte Black finish <input type="checkbox"/> -BBZ Brushed Bronze finish
Model Numbers <ul style="list-style-type: none"> <input type="checkbox"/> S-6704-TRM Tub/Hand Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve order seperately (modifiers include decimal points and hyphens) Note: To create sku, follow the format: Base SKU -> Finish -> Flow Rate (If lower than standard) -> TRM <input type="checkbox"/> S6704TRM Tub/Hand Shower Trim with integral volume control (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points) Note: To creat sku, follow the format: Base SKU -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than tandard) -> TRM -> TC 	Compliance <ul style="list-style-type: none"> • ASME A112.18.1/CSA B125.1 • WaterSense @ 1.5 gpm and 2.0 gpm (does not apply to L3 modification)   Warranty <p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 

Architectural/ Engineering Specification

Symmons Identity Tub and Hand Shower Trim _____ With Identity Tub and Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub and Shower Valve, Integral diverter control, Metal level handle, 5-1/4" non-diverter tub spout, Cradle for handshower wand, 60" flexible metal hose, 1 mode hand shower, Dual checks for backflow protection, 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap, For optional in-line vacuum breaker order p/n EF-109. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm and 2.0 gpm complaint. Available options include: "-1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L2 - Less hand shower wand", "L5 - Less hand shower system", "L6 - Less tub spout", "L7 - Less handle", "-STN - Satin nickel finish", and "TC - Test Cap Trim", "-MB - Matte Black finish", "-BBZ - Brushed Bronze finish".

Dimensions

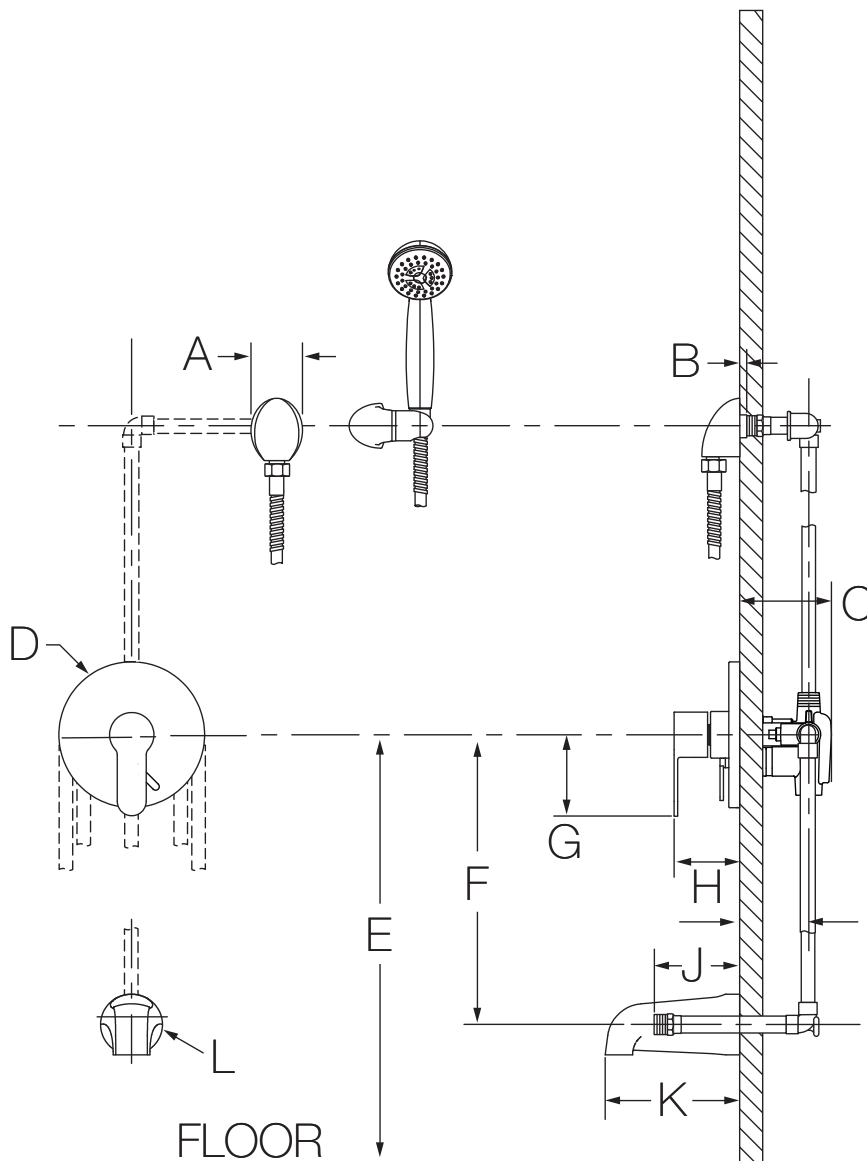

Measurements	
A	2-1/8", 54 mm
B	Male 1/2" IPS fitting must be recessed 1/4" (6 mm) from finished wall
C	3-1/2", 89 mm
D	Ø 6-3/8", 162 mm
E	Ref. 32", 813 mm
F	Ref. 12", 305 mm
G	3-1/2", 89 mm
H	2-7/8", 73 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
J	Male 1/2-14 NPT fitting must protrude 4" (102 mm) from finished wall
K	5-1/4", 133 mm
L	Ø 2-1/2", 64 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.