

3692TRM
Tub/Shower Trim

Location:

Specification Submittal

Model Numbers

- 3692TRM**
Tub/Shower Trim

Valve Options:

- 262 Series Temptrol Shower Valve with TRM modifiers
- 162 Series Temptrol Shower Valve requires TC modifier

Feature Highlights

- Duro Tub/Shower Trim.
- Requires Temptrol® Pressure Balancing Shower Valve.
- Metal lever handle.
- 5-5/8" square diverter tub spout.
- Single mode showerhead.
- Standard flow rate, 2.0 gpm (7.6 L/min).
- Components shall be metal and nonmetal construction, plated in standard polished chrome finish.

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation




Options/Modifications

- 15 GG** 1.5 gpm (5.7 L/min) flow restrictor
- 175** 1.75 gpm (6.6 L/min) flow rate restrictor
- L1** Less showerhead
- L4** Less head, arm and flange
- L7** Less handle
- TC** Test Cap Trim (includes TA-10&T-12A) *used with 162 series Temptrol Shower Valve*
- BBZ** Brushed Bronze finish
- MB** Matte Black finish
- STN** Satin Nickel finish

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


| Series | Finish | Modifier | Flow Rate | TRM (required) | TC | Final SKU |
|--------|--------|----------|-----------|----------------|----|---------------|
| 3692 | STN | | 15 | TRM | | 3692STN15TRM |
| 3692 | MB | L1 | | TRM | TC | 3692MBL1TRMTC |

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/Engineering Specification

Symmons Duro Tub and Shower Trim _____ Includes Duro Tub/Shower Trim powered by Temptrol® Pressure Balancing Shower Valve. Features metal lever handle, 5-5/8" square diverter tub spout, single mode showerhead, and standard 2.0 gpm (7.6 L/min) flow rate. Components shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year Commercial Warranty. Lever handle meets ADA requirements for operation. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), and 2.0 gpm (7.6 L/min) compliant. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "175 - 1.75 gpm (6.6 L/min) flow restrictor", "L1 - Less showerhead", "L4 - Less head, arm and flange", "L7 - Less handle", "TC - Test Cap Trim", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", and "STN - Satin Nickel finish".

Dimensions

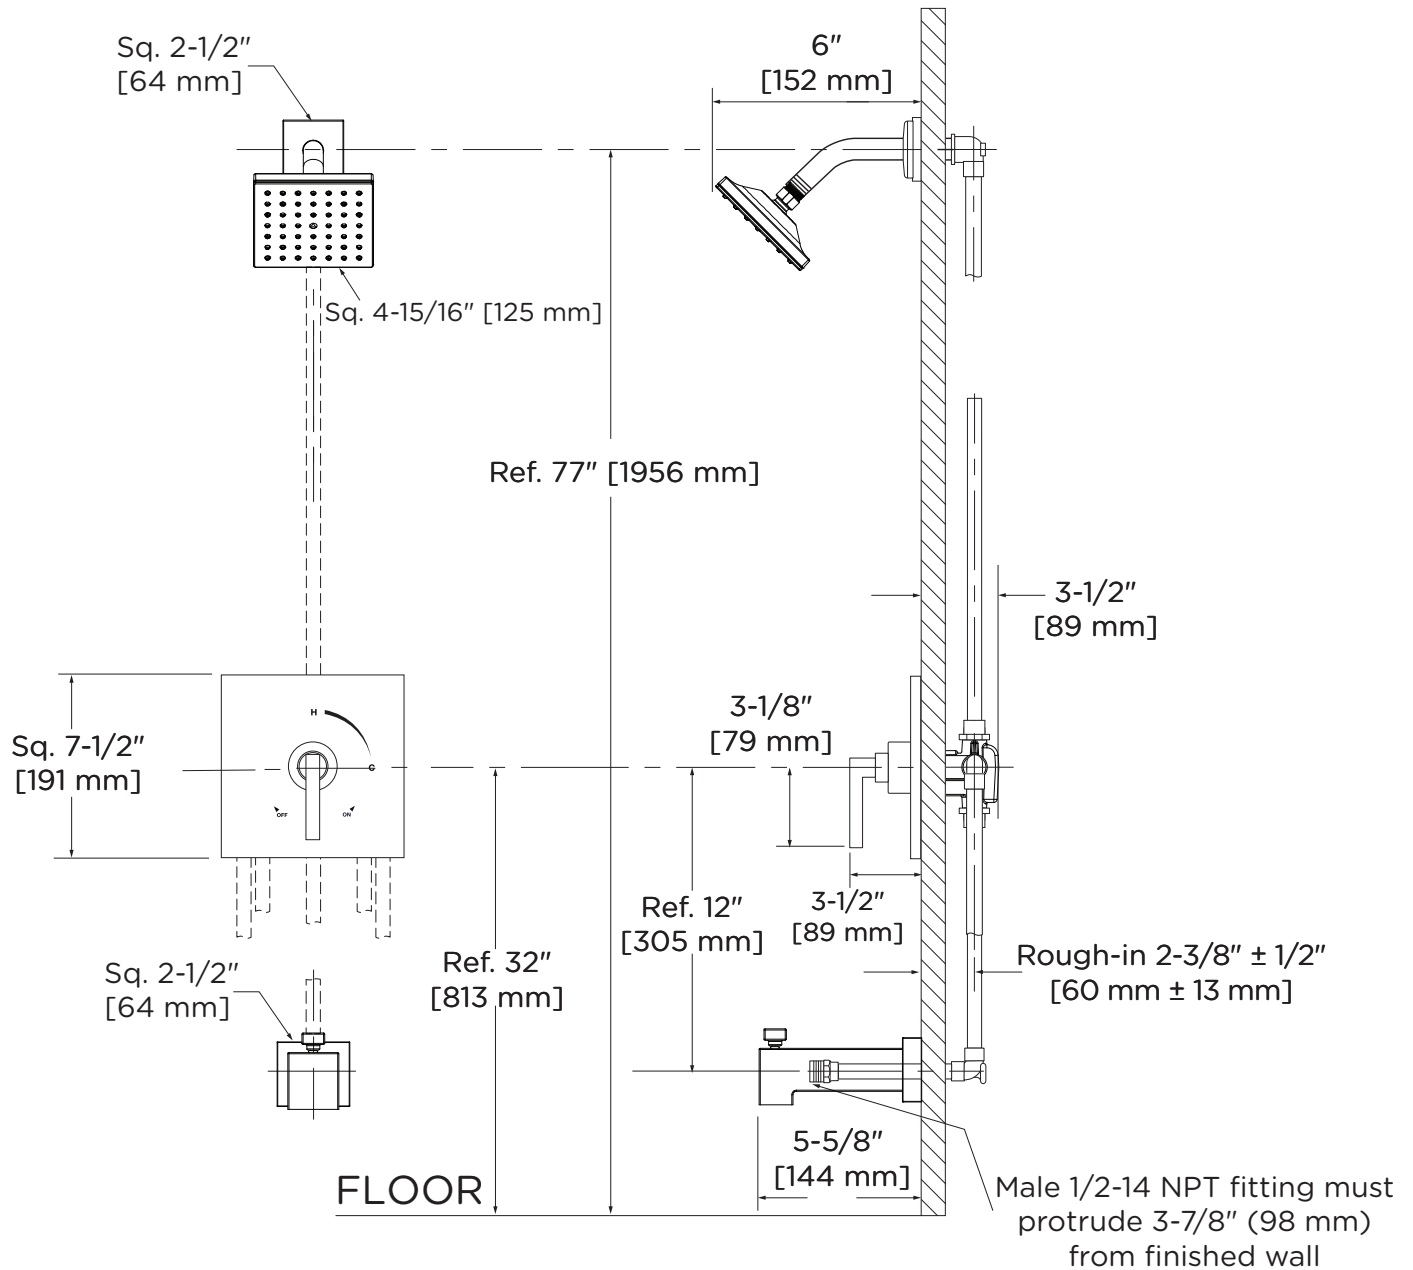

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.