

S4994TRM
Tub/Hand Shower Trim
Specification Submittal

Location:

Model Numbers

- S4994TRM**
Tub/Hand Shower Trim

Valve Options:

- S262 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier
- S162 Series Temptrol VersaFlex Shower Valve requires TC modifier

Feature Highlights


- Verity Tub/Hand Shower Trim.
- Requires Temptrol VersaFlex Pressure-Balancing Shower Valve.
- Metal lever handle.
- Slip-on non-diverter tub spout.
- Standard 2.0 gpm (7.6 L/min) flow regulator.
- Integral diverter control.
- 30" slide bar.
- 60" flexible metal hose.
- Single-mode HydroMersion® hand shower wand with Non-Positive Shutoff (NPSO).
- Dual checks for backflow protection.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation
- 1.5 gpm option meets CALGreen requirements



Options/Modifications

- MB** Matte Black finish
- STN** Satin Nickel finish
- 15**  1.5 gpm (5.7 L/Min) flow restrictor
- L2** Less hand shower (wand only)
- L5** Less handle shower system (less bar/cradle, hose, wand, and elbow)
- L7** Less handle
- TC** Test Cap Trim (includes TA-10™ & T-12A) used with S162 Series Temptrol VersaFlex Valve

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S4994	STN	L7	15	TRM		S4994STNL715TRM
S4994	MB			TRM	TC	S4994MBTRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons _____ Includes Verity Tub and Hand Shower Trim for Temptrol VersaFlex Pressure-Balancing Shower Valve. Features metal lever handle, slip-on non-diverter tub spout, 60" metal hose, integral diverter control, dual check valves for backflow protection, 30" slide bar, single-mode HydroMersion hand shower with NPSO, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) and 2.0 gpm (7.6 L/min) compliant. Lever handle and hand shower wand meets ADA requirements for operation. 1.5 gpm option meets CALGreen requirements. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L2 = Less hand shower, L5 = Less hand shower system (Less bar/cradle, hose, wand, and elbow), L7 = Less handle, MB = Matte Black finish, STN = Satin Nickel finish, TC = Test Cap Trim.

Dimensions

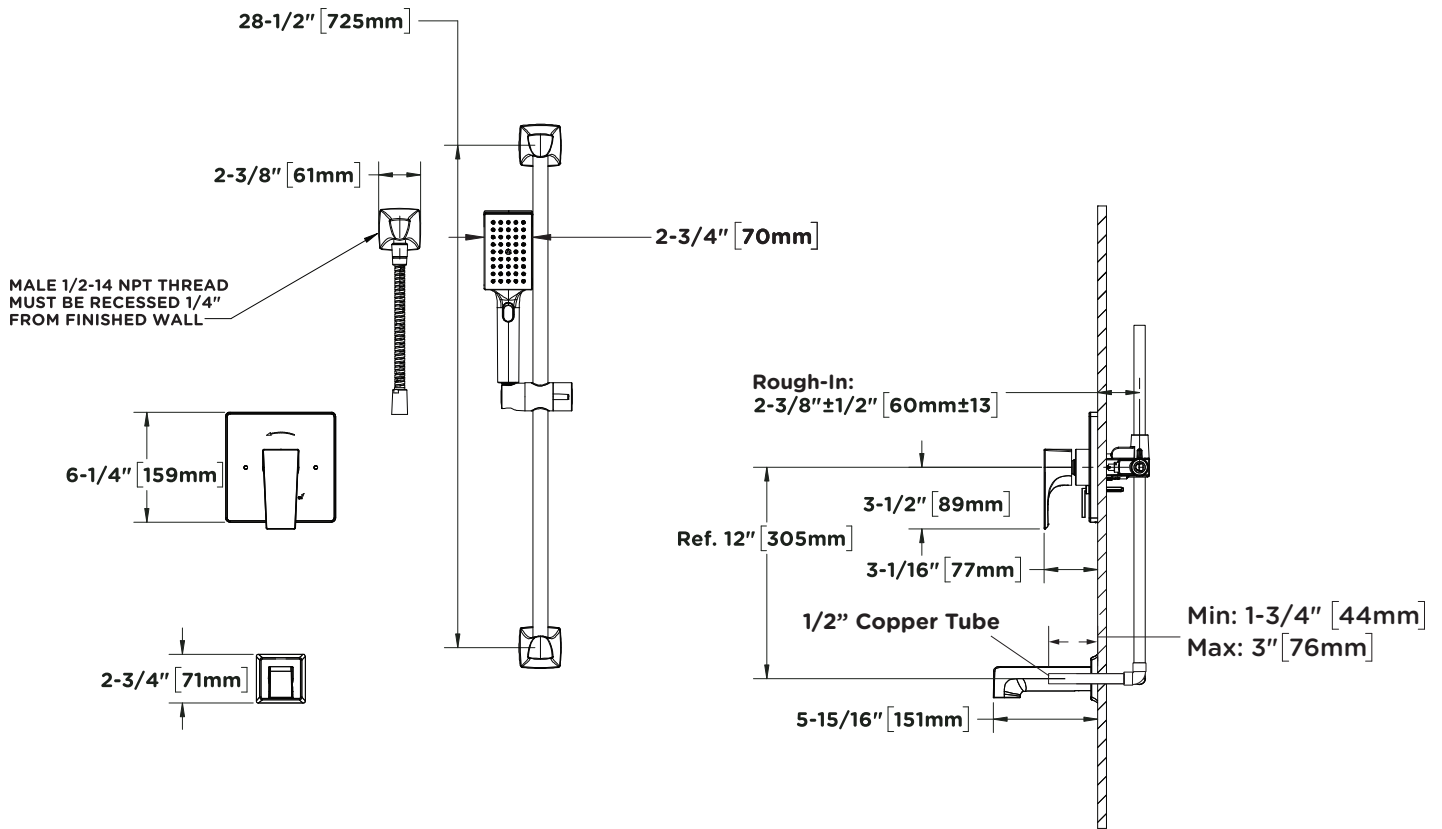

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.