

Location:



SYMMONS



Sereno[®]



S2302PD

Kitchen Faucet

Specification Submittal

<p>Model Number</p>	<p>Feature Highlights</p>
<p><input type="checkbox"/> S2302PD Kitchen faucet</p>	<ul style="list-style-type: none"> ▪ Single handle kitchen faucet with pull-down handspray spout and retractable hose ▪ Two mode handspray; standard stream and wide spray ▪ Spout has 360 degree rotation ▪ Ceramic control components ▪ Standard flow rate is 1.5 gpm (5.7 L/min) Optional lower flow rate restrictor available ▪ Braided hose water supply connections ▪ Single hole mount ▪ Metal construction, polished chrome finish (standard)
<p>Finish Options / Modifications</p>	
<p>Append appropriate suffix to model number</p> <ul style="list-style-type: none"> <input type="checkbox"/> CG 10 1.0 (3.8 L/min) flow rate restrictor <input type="checkbox"/> DP 8" deck plate <input type="checkbox"/> BBZ Brushed Bronze finish <input type="checkbox"/> MB Matte Black finish <input type="checkbox"/> STS Stainless Steel finish 	
<p>Warranty</p>	
<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 	<p>Feature Highlights</p> <ul style="list-style-type: none"> ▪ ASME A112.18.1/CSA B.125.1 ▪ NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 


Architectural/ Engineering Specification

Symmons Sereno_____ With Single handle kitchen faucet with pull-down handspray spout and retractable hose, Two mode handspray; standard stream and wide spray, Spout has 360 degree rotation, Ceramic control components, Standard flow rate is 1.5 gpm (5.7 L/min)Optional lower flow rate restrictor available, Braided hose water supply connections, Single hole mount, Metal construction, polished chrome finish (standard). 10 Year commercial Warranty. ASME A112.18.1/CSA B.125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, complaint. Available options include: "10 - 1.0 (3.8 L/min) flow rate restrictor", " DP - 8" deck plate", "BBZ- Brushed Bronze finish", "MB - Matte Black finish", "STS - Stainless Steel finish".

S2302PD

Dimensions

Dimensions Sereno Kitchen Faucet, S2302PD

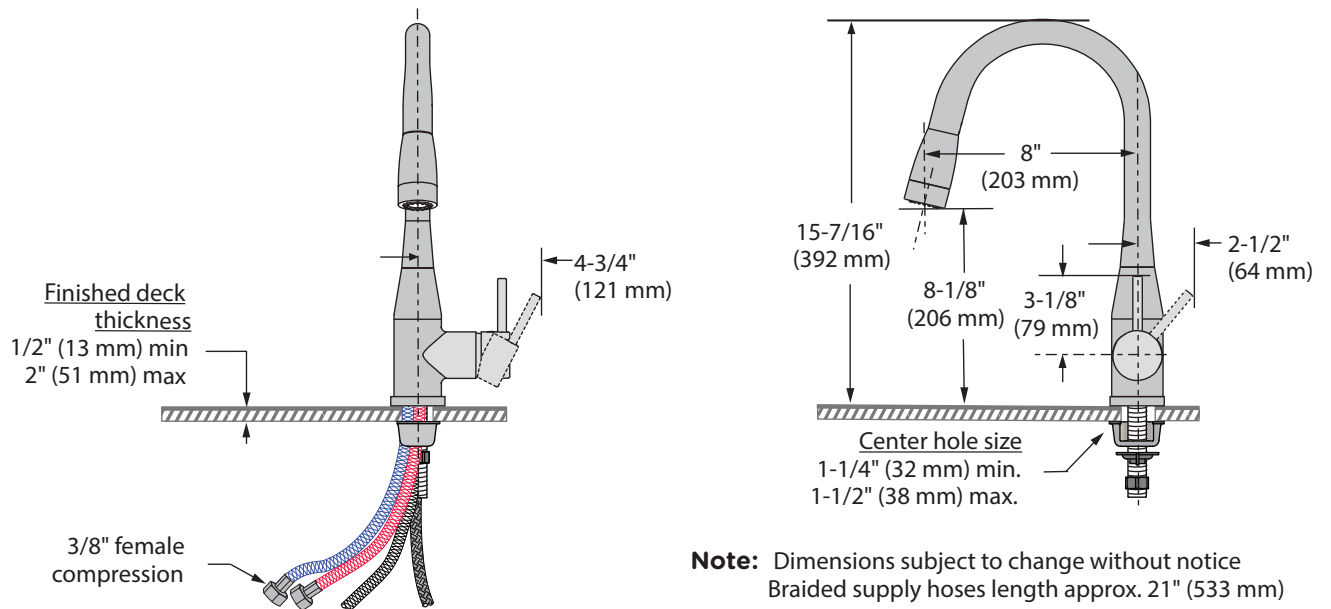

Emplacement:



SYMMONS

Sereno[®]



Robinet de cuisine S2302PD
Présentation des spécifications

Numéro de modèle

- S2302PD** Robinet de cuisine

Options/modifications du fini


Joindre le suffixe approprié au numéro de modèle

- CG** 10 Régulateur de débit de 3,8 L/min
- DP** Plaque de la base 203 mm (8po)
- BBZ** Fini bronze brossé
- MB** Fini noir mat
- STS** Fini acier inoxydable

Garantie

Garantie limitée - à l'acheteur original dans les installations du consommateur/résidentiel.

5 Ans - pour les installations commerciales/industriel. Se reporter au www.symmons.com/warranty pour l'information complète concernant la garantie.



Principales caractéristiques

- Robinet de cuisine mitigeur avec poignée de pulvérisation à tirer et tuyau rétractable
- Deux modes de pulvérisation; jet normal et jet large
- Le bec peut pivoter sur 360 degrés
- Composants des commandes en céramique
- Le débit standard est de 5,7 L/min (1,5 gpm) Régulateur de débit faible en option disponible
- Raccords de l'alimentation en tuyau tressé
- Montage à trou unique
- Fabrication de métal, fini chrome poli (standard)

Normes/certifications

- ASME A112.18.1/CSA B.125.1
- NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372



Dimensions Robinet de cuisine Sereno, S2302PD

