







Location:



SLW-3512-1.0, SLW-3510-1.0
Two Handle Widespread Lavatory Faucet
Specification Submittal




Model Numbers	Feature Highlights
<input type="checkbox"/> SLW-3512-1.0 <i>Two Handle Widespread Lavatory Faucet with Lift Rod and Metal Drain Assembly</i> <input type="checkbox"/> SLW-3510-1.0 <i>Two Handle Widespread Lavatory Faucet without Lift Rod Hole and Metal Drain Assembly</i>	<ul style="list-style-type: none"> • 8" to 16" mount configuration • Quarter turn ceramic cartridges • 7-1/4" height • Lift rod and metal drain assembly (SLW-3512-1.0 only) • Standard 1.0 gpm (3.8 L/min) flow rate • Faucet shall be metal construction, plated in standard polished chrome finish
Options/Modifications	Compliance
<input type="checkbox"/> -0.5  <i>0.5 gpm (1.9 L/min) flow restrictor</i> <input type="checkbox"/> -G <i>Grid drain (SLW-3510-1.0 only)</i> <input type="checkbox"/> -H2  <i>Alternative blade handle (chrome and satin nickel finish only)</i> <input type="checkbox"/> -H3  <i>Alternative cross handle (chrome and satin nickel finish only)</i> <input type="checkbox"/> -BBZ <i>Brushed Bronze finish</i> <input type="checkbox"/> -MB <i>Matte Black finish</i> <input type="checkbox"/> -STN <i>Satin Nickel finish</i> <p>Note: Append appropriate -suffix to model number.</p>	<p>-ASME A112.18.1/CSA B125.1 -NSF/ANSI 61.9; NSF/ANSI 372 -WaterSense 1.0 gpm (3.8 L/min)</p> <div style="text-align: right;">   </div> <hr/> <p>Warranty</p> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 

Architectural/ Engineering Specification

Symmons Two Handle Widespread Lavatory Faucet Dia _____ with 8" to 16" mount configuration, quarter turn ceramic cartridges, 7-1/4" height, lift rod and metal drain assembly (SLW-3512-1.0 only), standard 1.0 gpm (3.8 L/min) flow rate, faucet shall be metal construction, plated in standard polished chrome finish. 10 Years commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI 61.9; NSF/ANSI 372, WaterSense 1.0 gpm (3.8 L/min) complaint. Available options include: "-0.5 - 0.5 gpm (1.9 L/min) flow restrictor", "-G - Grid drain (SLW-3510-1.0 only)", "-H2 - Alternative blade handle", "-H3 - Alternative cross handle", "-BBZ - Brushed Bronze finish", "-MB - Matte Black finish", "-STN - Satin Nickel finish".

Dimensions

SLW-3512-1.0

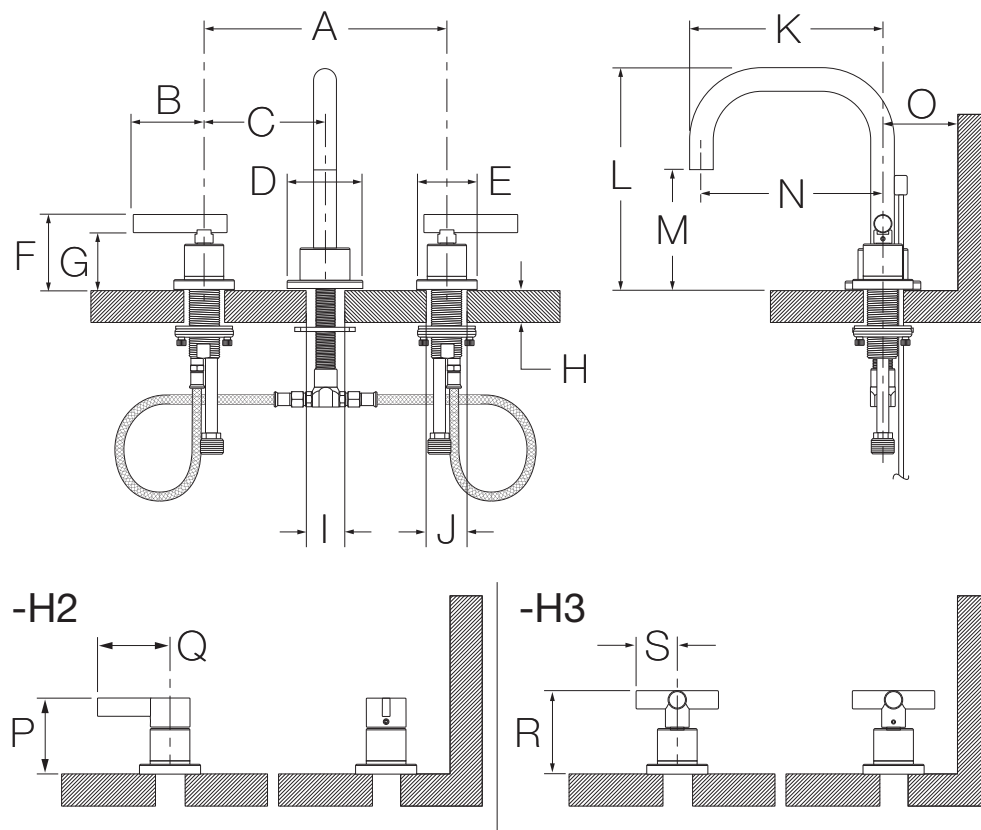

Measurements	
A	Min. 8", 203 mm Max. 16", 406 mm
B	2-3/8", 60 mm
C	Min. 4", 102 mm
D	2-1/2", 64 mm
E	2", 51 mm
F	2-1/2", 64 mm
G	1-7/8", 48 mm
H	Deck Thickness Ref. Max. 1-3/8", 35 mm
I	Hole Size Min. Ø 1-1/2", 38 mm Max. Ø 1-5/8", 41 mm
J	(2x) Hole size Min. Ø 1-1/8", 29 mm Max. Ø 1-1/2", 38 mm
K	6-3/8", 162 mm
L	7-1/4", 185 mm
M	3-7/8", 98 mm
N	6", 152 mm
O	Min. 1-1/2", 38 mm
P	2-1/2", 64 mm
Q	2-3/8", 60 mm
R	2-3/4", 70 mm
S	1-3/8", 35 mm

Note: Dimensions subject to change without notice.