

Location:



3503-H321-V-CYL-B-TRM, 3503H321CYLBTRMTC
 Hand Shower Trim
Specification Submittal




<p>Feature Highlights</p> <ul style="list-style-type: none"> • Dia Hand Shower Trim • Requires Temptrol® Pressure Balancing Shower Valve • Metal lever handle • 30" slide bar for hand shower wand • Dual checks for backflow protection • 60" flexible metal hose • 1 mode hand shower wand • 2.0 gpm (7.6 L/min) flow restrictor • Tub spout and showerhead not included • Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish • Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3503H321CYLBTRMTC) • For optional in-line vacuum breaker order p/n EF-109 	<p>Options/Modifications</p> <ul style="list-style-type: none"> <input type="checkbox"/> 1.5 CG 1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> 1.75 1.75 gpm (6.6 L/min) flow rate restrictor <input type="checkbox"/> Delete Suffix B Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon <input type="checkbox"/> BBZ Brushed Bronze finish <input type="checkbox"/> MB Matte Black finish <input type="checkbox"/> STN Satin Nickel finish <p>Note: Append appropriate -suffix to model number.</p>
<p>Model Numbers</p> <ul style="list-style-type: none"> <input type="checkbox"/> 3503-H321-V-CYL-B-TRM Hand Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately <input type="checkbox"/> 3503H321CYLBTRMTC Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap 	<p>Warranty</p> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
<p>Compliance</p> <ul style="list-style-type: none"> • ASME A112.18.1/CSA B125.1 • WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)  	

Architectural/Engineering Specification

Symmons Dia Hand Shower Trim _____ Includes Dia Hand Shower Trim, Requires Temptrol® Pressure Balancing Shower Valve, Metal lever handle, 30" slide bar for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, 1 mode hand shower wand, 2.0 gpm (7.6 L/min) flow restrictor, Tub spout and showerhead not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3503H321CYLBTRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "1.75 - 1.75 gpm (6.6 L/min) flow rate restrictor", "Delete Suffix B - Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish".

Dimensions

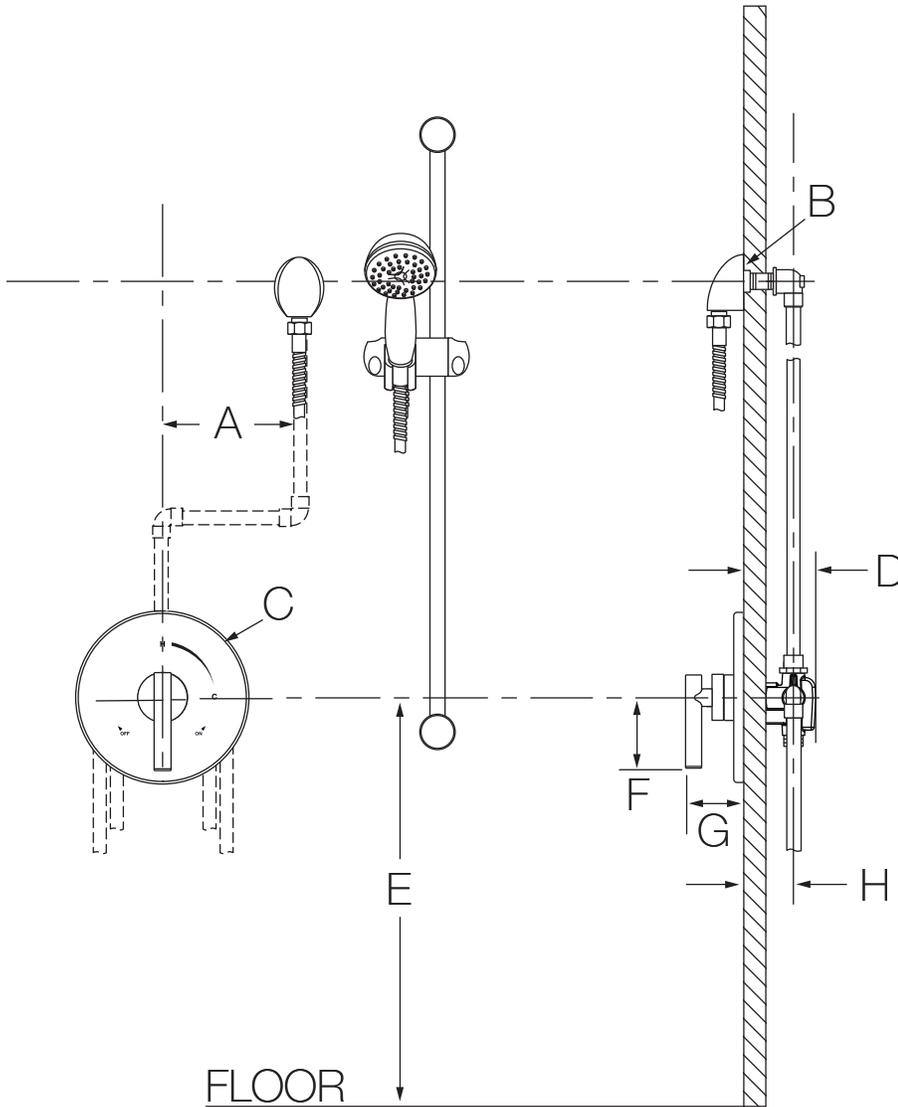

Measurements	
A	6", 152 mm
B	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
C	Ø 7-1/2", 191 mm
D	3-1/2", 89 mm
E	Ref. 42", 1067 mm
F	3", 76 mm
G	2-7/8", 73 mm
H	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see H as reference).
- 4) Dimensions subject to change without notice.