




Location:



S-9606-PLR, S-9606-PLR-TRM, S9606PLRTRMTC
Tub/Shower/Hand Shower System or Trim
Specification Submittal

Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> Origins Tub/Shower/Hand Shower System or Trim Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9606-PLR) Requires Symmons Dual Outlet Diverter Valve to divert showerhead from hand shower wand (included with S-9606-PLR) Adjustable stop screw to limit handle turn (included with S-9606-PLR) Integral diverter control to divert to tub spout Metal lever handles ADA 36" grab bar for hand shower Dual checks for backflow protection 60" flexible metal hose ADA 1 mode hand shower with non-positive shut-off 1 mode showerhead with easy to clean nozzles 5-1/4" non-diverter tub spout Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9606PLRTRMTC) For optional in-line vacuum breaker order p/n EF-109 	<ul style="list-style-type: none"> <input type="checkbox"/> 1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L2 Less hand shower (wand only) <input type="checkbox"/> L3 Less showerhead & hand shower wand <input type="checkbox"/> L4 Less head, arm & flange <input type="checkbox"/> L5 Less hand shower system (less bar, hose, wand and elbow) <input type="checkbox"/> L6 Less tub spout <input type="checkbox"/> L7 Less handle <input type="checkbox"/> STN Satin Nickel finish <input type="checkbox"/> B Brass escutcheon (chrome only) <input type="checkbox"/> X Integral service stops - allows water shut-off at valve for service <p>Note: Append appropriate suffix to model number.</p>
Model Numbers	Compliance
<ul style="list-style-type: none"> <input type="checkbox"/> S-9606-PLR Tub/Shower/Hand Shower System with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve & Symmons Dual Outlet Diverter Valve <input type="checkbox"/> S-9606-PLR-TRM Tub/Shower/Hand Shower Trim with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve & Symmons Dual Outlet Diverter Valve ordered separately <input type="checkbox"/> S9606PLRTRMTC Tub/Shower/Hand Shower Trim with integral diverter control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap 	<ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 Buy American Act (S-9606-PLR only) WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)  
Architectural/ Engineering Specification	
<p>Symmons Origins _____ With Origins Tub/Shower/Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9606-PLR), Requires Symmons Dual Outlet Diverter Valve to divert showerhead from hand shower wand (included with , S-9606-PLR), Adjustable stop screw to limit handle turn (included with S-9606-PLR), Integral diverter control to divert to tub spout, Metal lever handles, ADA 36" grab bar for hand shower, Dual checks for backflow protection, 60" flexible metal hose, ADA 1 mode hand shower with non-positive shut-off, 1 mode showerhead with easy to clean nozzles, 5-1/4" non-diverter tub spout, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9606PLRTRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower (wand only)", "L3 - Less showerhead & hand shower wand", "L4 - Less head, arm & flange", "L5 - Less hand shower system (less bar, hose, wand and elbow)", "L6 - Less tub spout", "L7 - Less handle", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service".</p>	
<p>Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184 ■ Phone: (800) 796-6667 ■ Fax: (800) 961-9621 Copyright © 2022 Symmons Industries, Inc. ■ symmons.com ■ gethelp@symmons.com ■ ZV-1321 REV D ■ 051222</p>	

Compliance

- ASME A112.18.1/CSA B125.1
- Buy American Act (S-9606-PLR only)
- WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)




Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Dimensions

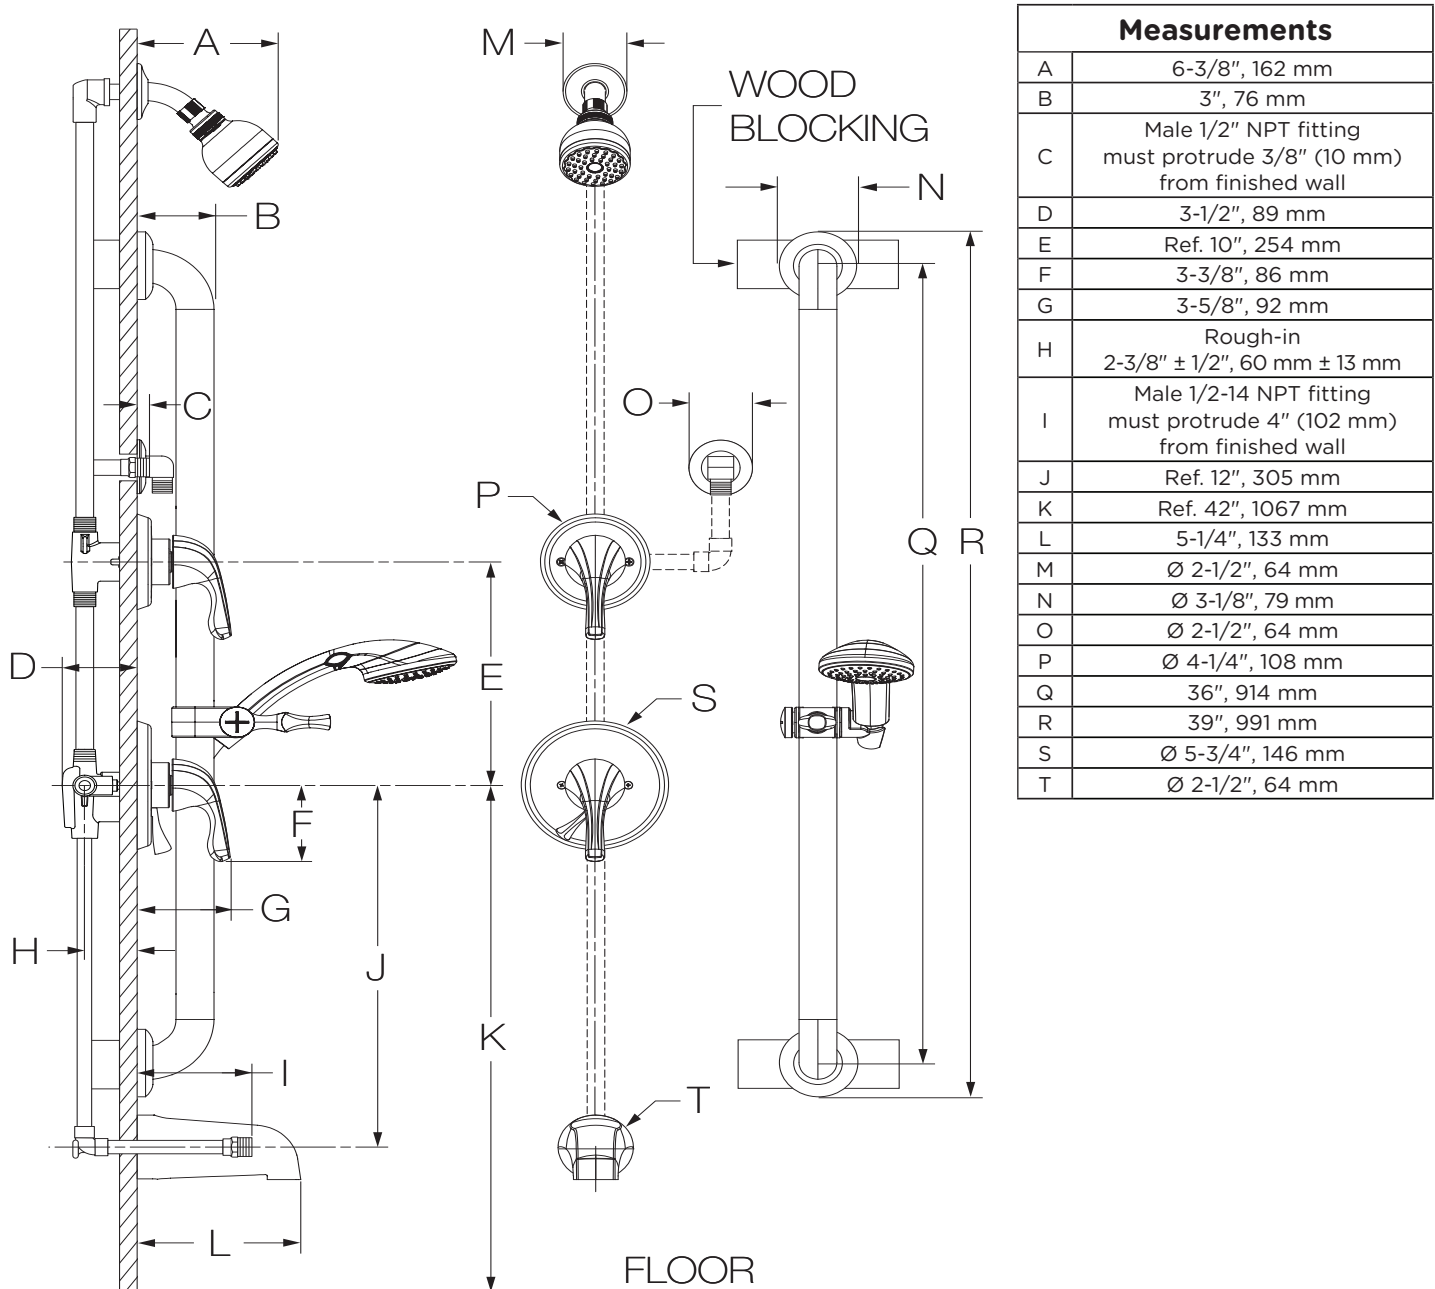

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see H as reference).
- 4) Dimensions subject to change without notice.