






Location:



102601TRM, 102600TRM
Shower / Valve Trim

Installation Guide


Model Number	Specification
<input type="checkbox"/> 102601TRM Shower / Valve Trim <input type="checkbox"/> 102600TRM Shower / Valve Trim, Less shower arm & flange	Shower trim includes 1 mode shower head and 1.75 gpm (6.6 L/min) flow restrictor. Components made from metal and nonmetallic materials, plated in standard brushed matte brass finish.
Warranty	Options/ Modifications
<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 	<input type="checkbox"/> L1 Less showerhead Note: Append appropriate -suffix to model number.
Dimensions	Compliance <ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 

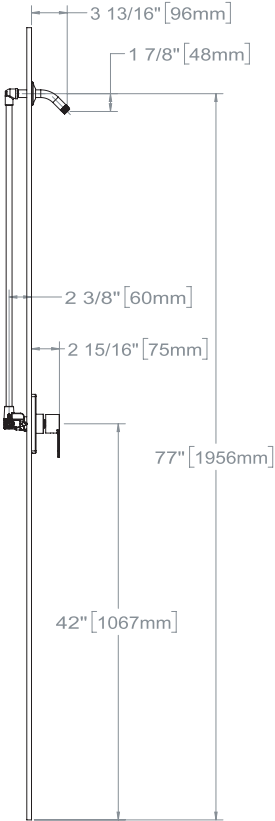





Valves, piping and finished wall shown for reference only

Note: Dimensions subject to change without notice.

Parts Breakdown

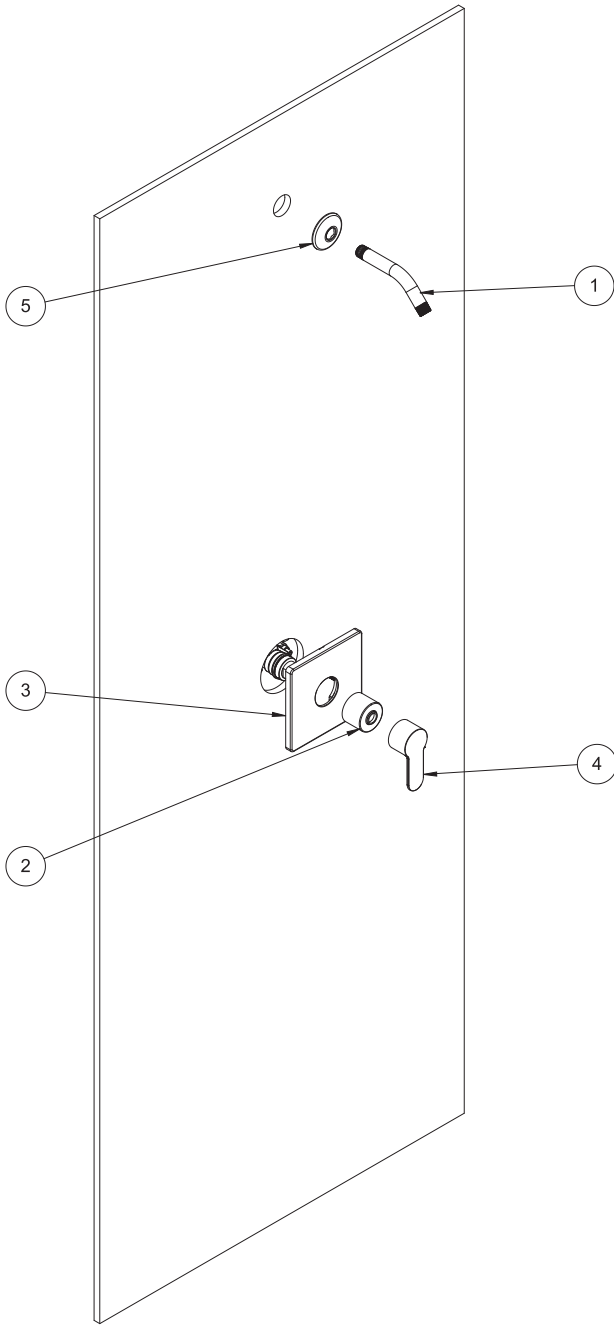

Replacement Parts		
Item	Description	Part Number
1	Shower Arm	300S
2	Dome	T-19
3	Escutcheon	T-02424-K001
4	Handle	T-03668
5	Flange	430SS

Tools Required for Installation	
Allen Wrench 2.5 mm	
Phillips Head Screwdriver	
Plumber Tape	
Silicone	

Notes:

- 1) Apply a bead of silicone around the perimeter of all shower trim installed flush to the finished wall (less mounting plates and brackets). Leave opening on bottom of escutcheons for weep hole.
- 2) Apply plumber tape to all threaded connections.