





Location:



3606-H321-V-TRM, 3606TRM
Tub/Shower/Hand Shower Trim
Specification Submittal

<h3>Feature Highlights</h3> <ul style="list-style-type: none"> Duro Tub/Shower/Hand Shower Trim Requires Temptrol® Pressure Balancing Tub/Shower Valve Requires Symmons Triple Outlet Diverter Valve Metal lever handle 30" slide bar for hand shower wand Dual checks for backflow protection 60" flexible metal hose 7" non-diverter tub spout 1 mode hand shower wand Standard 2.0 gpm (7.6 L/min) flow restrictor Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish For optional in-line vacuum breaker order p/n EF-109 	<h3>Options/Modifications</h3> <ul style="list-style-type: none"> <input type="checkbox"/> -1.5 CG 1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> -BBZ Brushed Bronze finish <input type="checkbox"/> -MB Matte Black finish <input type="checkbox"/> -STN Satin Nickel finish <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L2 Less hand shower <input type="checkbox"/> L3 Less showerhead and hand shower <input type="checkbox"/> L5 Less hand shower system <input type="checkbox"/> L7 Less handle <input type="checkbox"/> TC Test Cap Trim (includes TA-10&T-12A) used with 16 series Temptrol Valve
<h3>Model Numbers</h3> <ul style="list-style-type: none"> <input type="checkbox"/> 3606-H321-V-TRM Tub/Shower System Trim (modifiers include decimal points and hyphens) <input type="checkbox"/> 3606TRM Tub/Shower System Trim (use when ordering L1-L7 and TC modification, do not use hyphens or decimal points) 	<h3>Warranty</h3> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
<h3>Compliance</h3> <ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) Lever handle meets ADA requirements   	

SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
3606-H321-V-CYL	STN		1.5	TRM		3606-H321-V-CYL-STN-1.5-TRM
3606	MB	L3		TRM	TC	3606MBL3TRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/Engineering Specification

Symmons Duro Tub and Shower and Hand Shower Trim _____ Includes Duro Tub and Shower and Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve, Requires Symmons Triple Outlet Diverter Valve, Metal lever handle, 30" slide bar for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, 7" non-diverter tub spout, 1 mode hand shower wand, Standard 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3606H321TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish", "L1 - Less showerhead", "L2 - Less hand shower", "L3 - Less showerhead and hand shower", "L5 - Less hand shower system", "L7 - Less handle", "TC - Test Cap Trim".

Dimensions

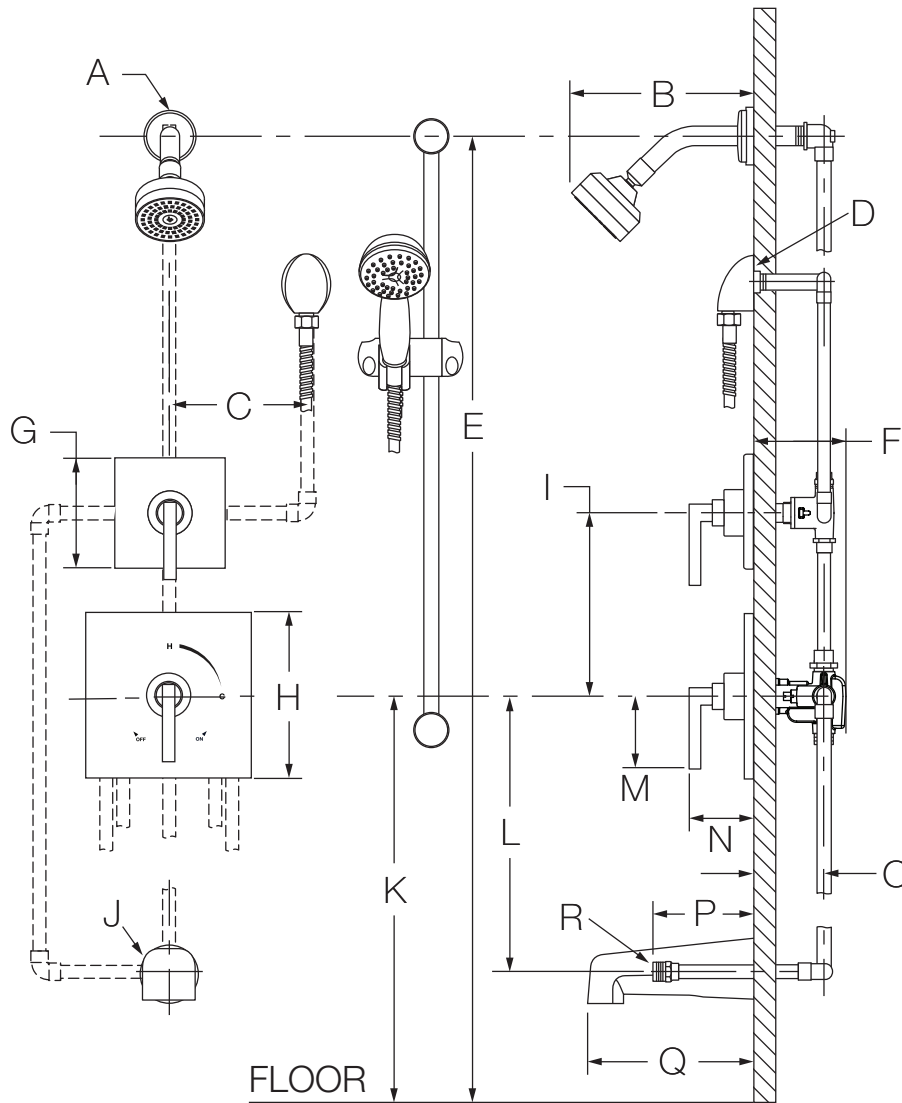

Measurements	
A	Ø 2-1/2", 64 mm
B	6", 152 mm
C	6", 152 mm
D	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
E	Ref. 77", 1956 mm
F	3-1/2", 89 mm
G	Sq. 5", 127 mm
H	Sq. 7-1/2", 191 mm
I	Ref. 10", 254 mm
J	Ø 2-1/2", 64 mm
K	Ref. 32", 813 mm
L	Ref. 12", 305 mm
M	3-1/8", 79 mm
N	3-1/2", 89 mm
O	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
P	5-1/4", 133 mm
Q	7", 178 mm
R	Male 1/2-14 NPT fitting must protrude 5-1/4" (133 mm) from finished wall

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see O as reference).
- 4) Dimensions subject to change without notice.