





Location:




S-9601-PLR, S-9601-PLR-TRM, S9601-PLR-TRMTC Shower System or Trim Specification Submittal

Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> • Origins Shower System or Trim • Requires Temptrol® Pressure Balancing Shower Valve (included with S-9601-PLR) • Adjustable stop screw to limit handle turn (included with S-9601-PLR) • Integral volume control • Metal lever handle • 1 mode showerhead with easy to clean nozzles • Diverter tub spout not included • Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish • Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9601PLRTRMTC) 	<ul style="list-style-type: none"> <input type="checkbox"/> 1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L4 Less head arm and flange <input type="checkbox"/> L7 Less handle <input type="checkbox"/> VP Vandal resistant escutcheon screws in place of standard screws <input type="checkbox"/> STN Satin Nickel finish <input type="checkbox"/> B Brass escutcheon (chrome only) <input type="checkbox"/> X Integral service stops - allows water shut-off at valve for service
<h3>Model Numbers</h3>	<p>Note: Append appropriate suffix to model number.</p>
<ul style="list-style-type: none"> <input type="checkbox"/> S-9601-PLR Shower System with integral volume control & Temptrol Pressure Balancing Shower Valve <input type="checkbox"/> S-9601-PLR-TRM Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately <input type="checkbox"/> S9601-PLR-TRMTC Shower Trim with integral volume control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap 	<h3>Compliance</h3> <ul style="list-style-type: none"> • ASME A112.18.1/CSA B125.1 • Buy American Act (S-9601-PLR only) • WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) <div style="display: flex; align-items: center;">   </div> <h3>Warranty</h3> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 

Architectural/ Engineering Specification

Symmons Origins _____ With Origins Shower System or Trim, Requires Temptrol® Pressure Balancing Shower Valve (included with S-9601-PLR), Adjustable stop screw to limit handle turn (included with S-9601-PLR), Integral volume control, Metal lever handle, 1 mode showerhead with easy to clean nozzles, Diverter tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9601PLRTRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L4 - Less head arm and flange", "L4 - Less handle", "VP - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service".

Dimensions

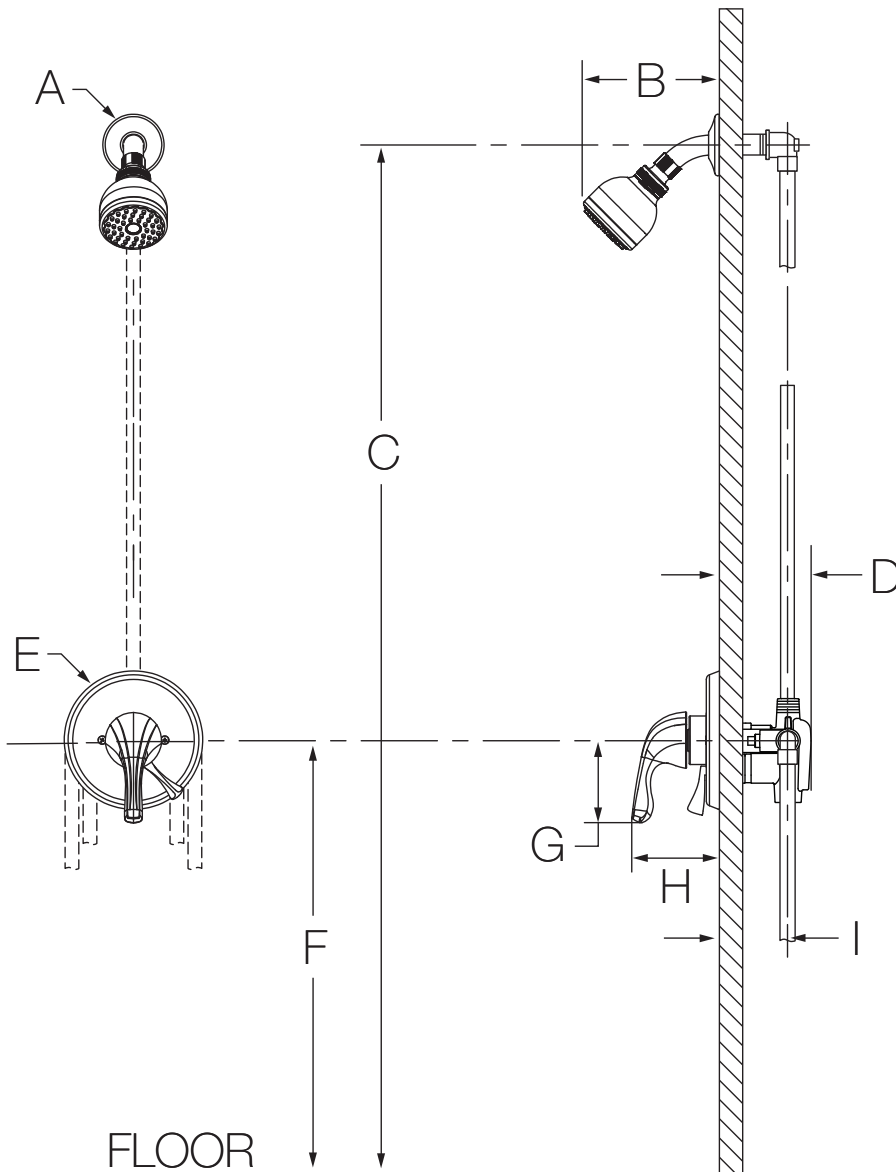

Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/8", 162 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Ø 5-3/4", 146 mm
F	Ref. 42", 1067 mm
G	3-3/8", 86 mm
H	3-5/8", 92 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.